



PRINCIPAL FEATURES

- OptiView™: OptiView LED lights
- EventLift™: Easily rearrange the shelving without removal using the EvenLift system
- ProVent™: Uniform air circulation maintains consistent temperatures throughout the appliance resulting in better food preservation
- Antibacterial Stainless Steel Interiors Drawers: Achieve the highest food quality by storing food in the stainless steel interior drawer that shields against the spread of bacteria
- Total No Frost: No more frost build-up that requires defrosting
- EquiLance™: Achieve a seamless built-in look with Benessi's innovative door hinge
- Soft - Close System: State-of-the-art closing system ensures refrigerator crisper drawer close smoothly and quietly.
- Vacation: Reduce energy usage and optimize food storage during vacations using the setting
- Shopping: Use the shopping function to quickly cool room temperature or food recently placed into the refrigerator
- Sabbath Mode

TECHNICAL DETAILS

Total Absorbed Current (A)	2.5
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length	78 3/4" (2 m)
Plug Type	Nema 5-15P
Climate Class	SN/T
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	N/A
Estimated Yearly Electricity Use	296 kwh

GENERAL PROPERTIES

• Equilance Hinge	YES
• Soft-Closing Glides	YES
• Low Vibration	YES
• OptieView (Led Light Spots)	YES
• Shelves	3
• Type Of Shelves	GLASS
• Door Bins	3
• Fridge Interior Drawers	3
• Freezer Drawers	N/A
• Evenlift Shelves	YES
• Full Extension Shelves 90° Door Opening	NO
• Full Extension Drawers 90° Door Opening	YES
• Defrost Process	AUTOMATIC
• Door Open Alarms	YES
• Shopping Fridge	YES
• Shopping Freezer	NO
• Power Failure Alert	YES
• Ice Maker With Water Filter	NO
• Water Dispenser With Water Filter	NO
• Water Filter Cartridge	NO
• Net Capacity	13 cuft (368 l)


TEMPERATURE RANGES

• Climate Zones	1
• Compartment 1 / Upper Temperature	from 34 °F (1 °C) to 45 °F (7 °C)

DIMENSIONS & WEIGHT


Height Of The Product (Minimum)	83 1/2" (2120 mm)
Adjustable Feet Height	up to 1" (25 mm)
Width Of The Product	23 7/8" (608 mm)
Depth Of Product Without Handle	24" (610 mm)
Cut-out Height	84" (2134 mm)
Cut-out Width	24" 610 mm)
Cut-out Depth	min 24" (610 mm) + panel thickness for flush install
Net Weight	291 lbs (132 kg)
Gross Weight	335 lbs (152 kg)

FRONT VIEW

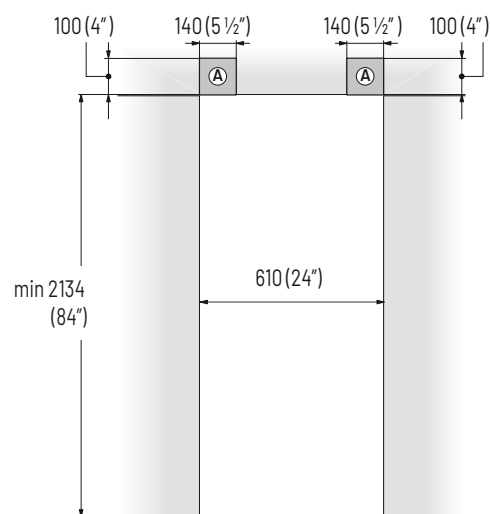


A
Area to be left clear for the anti-tipping brackets

SIDE VIEW

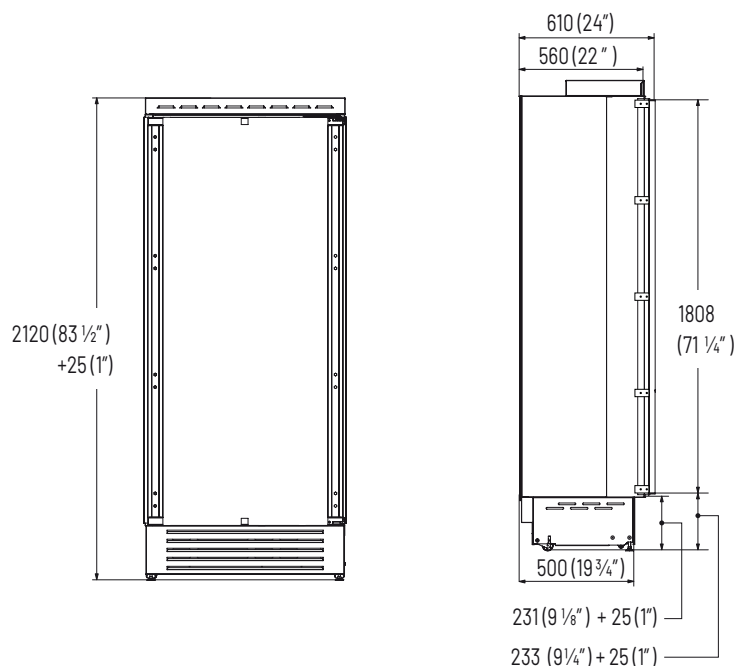


CUSTOM PANELS INFORMATION

PLINTH SIZE

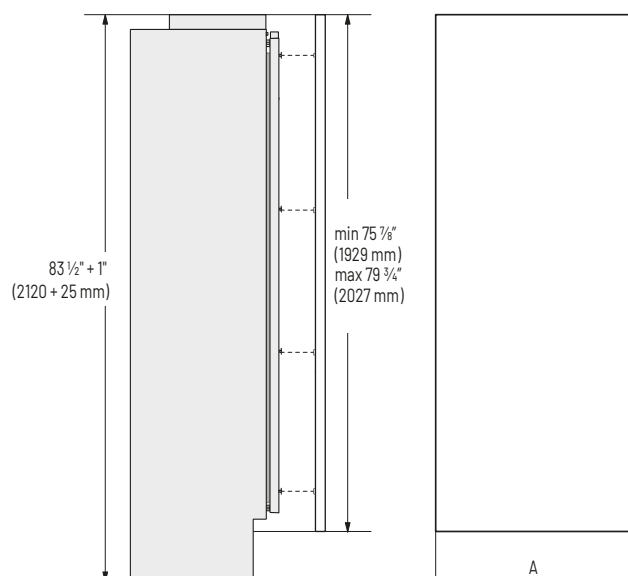

Serie	A
24"	23 3/4" (604 mm)


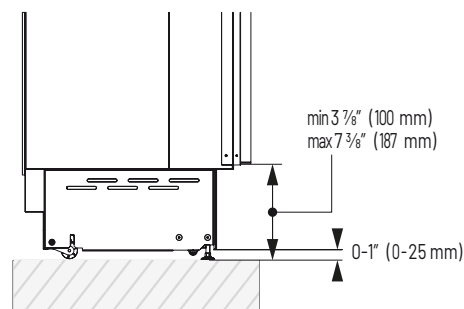


INTEGRATED PANEL RECOMMENDATIONS


Panels with thickness ranging between 3/4" in (18 mm) and 1 1/8" in (28 mm)

Door Panels Weight Max	75 lbs (34 kg)
Drawer Panels Weight Max	N/A lbs (N/A kg)

TOP VIEWS

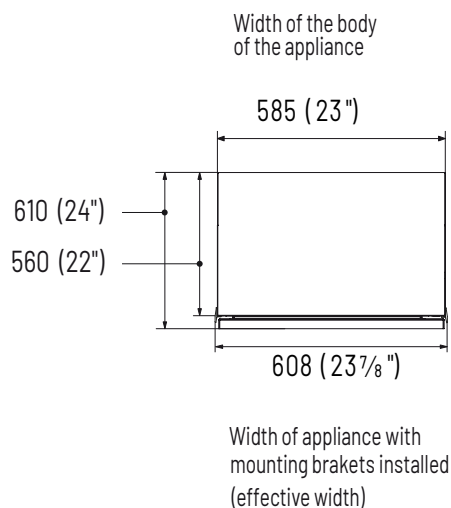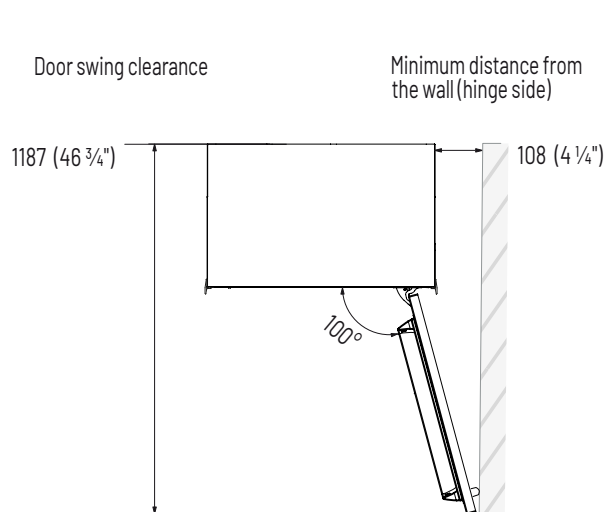

ELECTRICAL CONNECTION

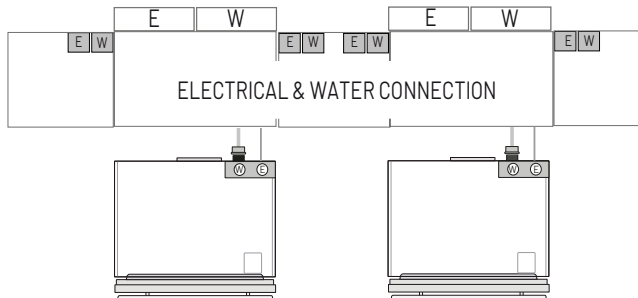

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.