



### PRINCIPAL FEATURES

- TriMode™: Total Flexibility, make the bottom drawer a refrigerator, fresh food space, or freezer with the control menu
- OptiView™: OptiView LED lights
- EventLift™: Easily rearrange the shelving without removal using the EvenLift system
- ProVent™: Uniform air circulation maintains consistent temperatures throughout the appliance resulting in better food preservation
- Antibacterial Stainless Steel Interiors Drawers: Achieve the highest food quality by storing food in the stainless steel interior drawer that shields against the spread of bacteria
- Total No Frost: No more frost build-up that requires defrosting
- Ice Maker: Get high-quality ice cubes in a variety of sizes
- Water Filter: Get pure water and crystal-clear ice thanks to the integrated water filter and ice maker
- SuperIce™: Temporarily increase ice cube production for gatherings and parties
- EquiLance™: Achieve a seamless built-in look with Benessi's innovative door hinge
- Soft - Close System: State-of-the-art closing system ensures refrigerator crisper drawer close smoothly and quietly.

### TECHNICAL DETAILS

|                                      |                               |
|--------------------------------------|-------------------------------|
| Total Absorbed Current (A)           | 3.5                           |
| Voltage (V)                          | 115                           |
| Frequency (Hz)                       | 60                            |
| Power Cord Length                    | 78 3/4" (2 m)                 |
| Plug Type                            | Nema 5-15P                    |
| Climate Class                        | SN/T                          |
| Refrigerant (Gas)                    | R600a                         |
| Water Connection / Female Attachment | 3/4" NPT (1/4" elbow adapter) |

### GENERAL PROPERTIES

|                                           |                   |
|-------------------------------------------|-------------------|
| • Equilance Hinge                         | YES               |
| • Soft-Closing Glides                     | YES               |
| • Low Vibration                           | YES               |
| • OptiView (Led Light Spots)              | YES               |
| • Shelves                                 | 2                 |
| • Type Of Shelves                         | GLASS             |
| • Door Bins                               | 3                 |
| • Fridge Interior Drawers                 | 2                 |
| • Freezer Drawers                         | 1 + 1 internal    |
| • Evenlift Shelves                        | YES               |
| • Full Extension Shelves 90° Door Opening | NO                |
| • Full Extension Drawers 90° Door Opening | YES               |
| • Defrost Process                         | AUTOMATIC         |
| • Door Open Alarms                        | YES               |
| • Shopping Fridge                         | YES               |
| • Shopping Freezer                        | YES               |
| • Power Failure Alert                     | YES               |
| • Ice Maker With Water Filter             | YES               |
| • Water Dispenser With Water Filter       | NO                |
| • Water Filter Cartridge                  | YES               |
| • Net Capacity                            | 15.5 cuft (440 l) |


### TEMPERATURE RANGES

|                                      |                                       |
|--------------------------------------|---------------------------------------|
| • Climate Zones                      | 2                                     |
| • Compartment 1 / Upper Temperature  | from 34 °F ( 1° C ) to 45 °F ( 7° C ) |
| • Compartment 2 / Middle Temperature | N/A                                   |
| • Compartment 3 / Low Temperature    | from 9 °F (-13 °C) to -9 °F (-23 °C)  |

### DIMENSIONS & WEIGHT


|                                 |                                                      |
|---------------------------------|------------------------------------------------------|
| Height Of The Product (Minimum) | 83 1/2" (2120 mm)                                    |
| Adjustable Feet Height          | up to 1" (25 mm)                                     |
| Width Of The Product            | 29 7/8" (760 mm)                                     |
| Depth Of Product Without Handle | 24" (610 mm)                                         |
| Cut-out Height                  | 84" (2134 mm)                                        |
| Cut-out Width                   | 30" (762 mm)                                         |
| Cut-out Depth                   | min 24" (610 mm) + panel thickness for flush install |
| Net Weight                      | 373 lbs (169 kg)                                     |
| Gross Weight                    | 419 lbs (190 kg)                                     |

FRONT VIEW

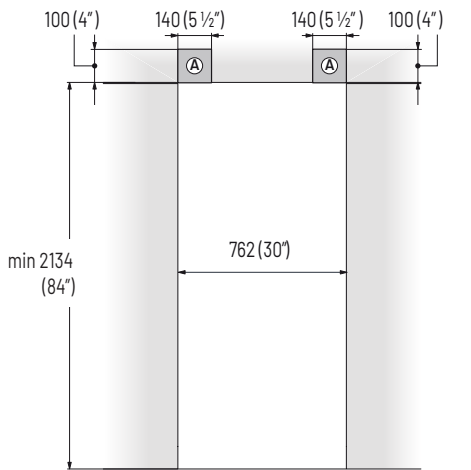


A  
Area to be left clear for the anti-tipping brackets

SIDE VIEW

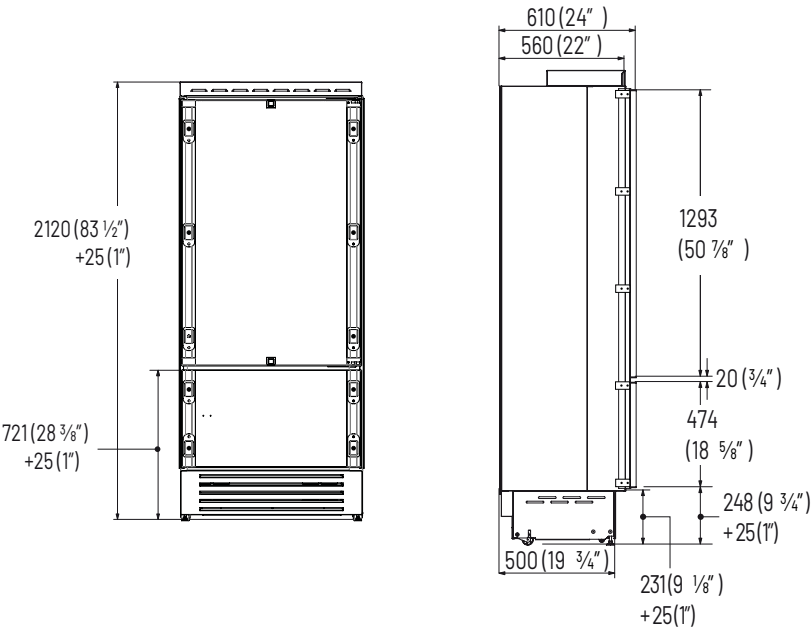


CUSTOM PANELS INFORMATION

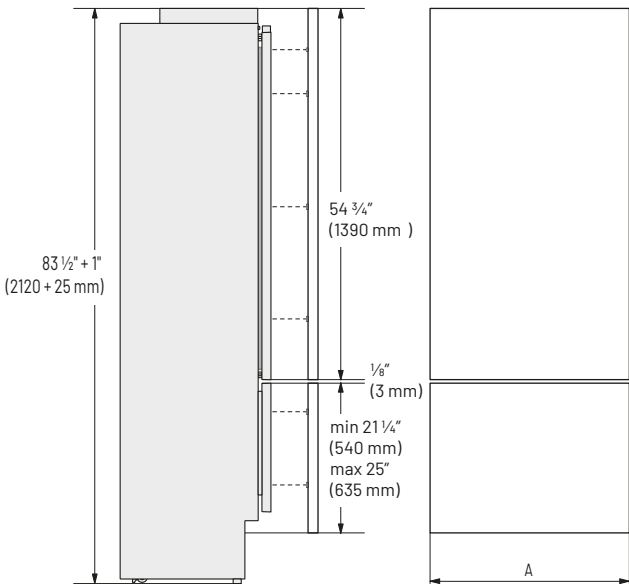

| Serie | A                |
|-------|------------------|
| 30"   | 29 3/4" (756 mm) |

PLINTH SIZE

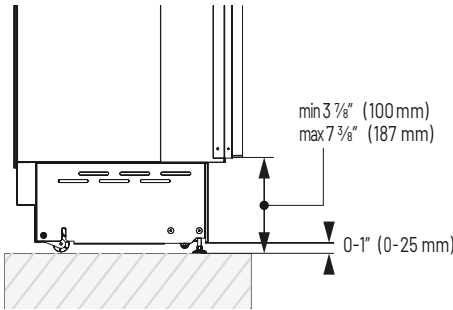


INTEGRATED PANEL RECOMMENDATIONS


Panels with thickness ranging between 3/4" in (18 mm) and 1 1/8" in (28 mm)

|                          |                |
|--------------------------|----------------|
| Door Panels Weight Max   | 51 lbs (23 kg) |
| Drawer Panels Weight Max | 24 lbs (11 kg) |

### TOP VIEWS

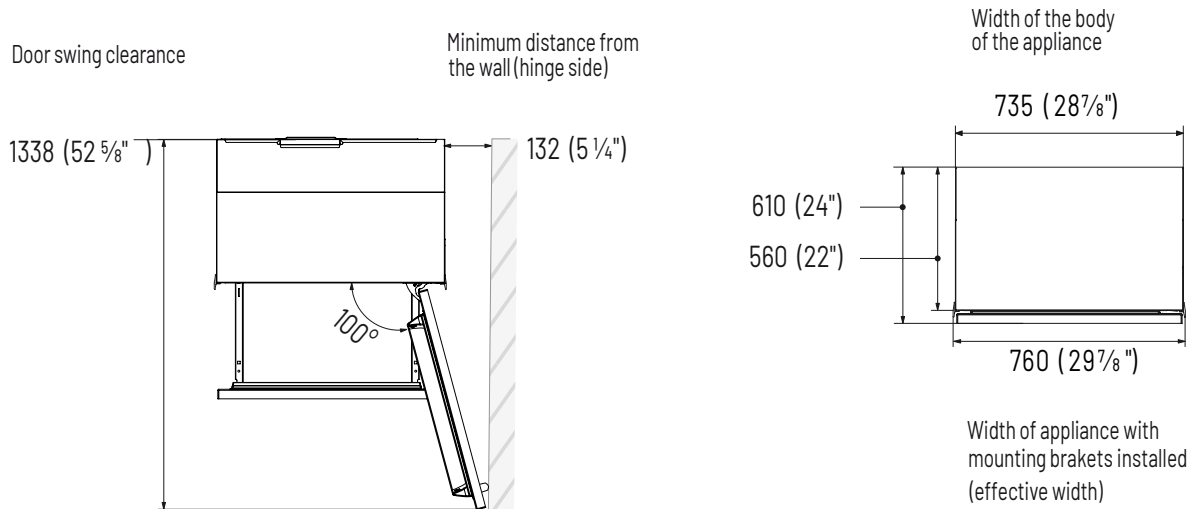

### ELECTRICAL CONNECTION

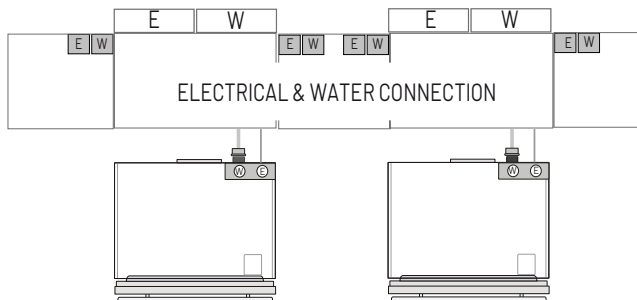

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

**IMPORTANT:** do not put the water shut-off valve behind the appliance where it will be inaccessible.