

BKFRZ36SSR

36" Bottom Mount Fridge and Freezer with Stainless Steel Door

 BENESSI



PRINCIPAL FEATURES

- TriMode™: Total Flexibility, make the bottom drawer a refrigerator, fresh food space, or freezer with the control menu
- OptiView™: OptiView LED lights
- EventLift™: Easily rearrange the shelving without removal using the EvenLift system
- ProVent™: Uniform air circulation maintains consistent temperatures throughout the appliance resulting in better food preservation
- Antibacterial Stainless Steel Interiors Drawers: Achieve the highest food quality by storing food in the stainless steel interior drawer that shields against the spread of bacteria
- Total No Frost: No more frost build-up that requires defrosting
- Ice Maker: Get high-quality ice cubes in a variety of sizes
- Water Filter: Get pure water and crystal-clear ice thanks to the integrated water filter and ice maker
- SuperIce™: Temporarily increase ice cube production for gatherings and parties
- EquiLance™: Achieve a seamless built-in look with Benessi's innovative door hinge
- Soft - Close System: State-of-the-art closing system ensures refrigerator crisper drawer close smoothly and quietly.

TECHNICAL DETAILS

Total Absorbed Current (A)	3.5
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length	78 3/4" (2 m)
Plug Type	Nema 5-15P
Climate Class	SN/T
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	3/4" NPT (1/4" elbow adapter)

GENERAL PROPERTIES

• Equilance Hinge	YES
• Soft-Closing Glides	YES
• Low Vibration	YES
• OptiView (Led Light Spots)	YES
• Shelves	2
• Type Of Shelves	GLASS
• Door Bins	3
• Fridge Interior Drawers	2
• Freezer Drawers	1+1 internal
• Evenlift Shelves	YES
• Full Extension Shelves 90° Door Opening	NO
• Full Extension Drawers 90° Door Opening	YES
• Defrost Process	AUTOMATIC
• Door Open Alarms	YES
• Shopping Fridge	YES
• Shopping Freezer	YES
• Power Failure Alert	YES
• Ice Maker With Water Filter	YES
• Water Dispenser With Water Filter	NO
• Water Filter Cartridge	YES
• Net Capacity	19.6 cuft (556 l)


TEMPERATURE RANGES

• Climate Zones	2
• Compartment 1 / Upper Temperature	from 34 °F (1° C) to 45 °F (7° C)
• Compartment 2 / Middle Temperature	N/A
• Compartment 3 / Low Temperature	from 9 °F (-13 °C) to -9 °F (-23 °C)

DIMENSIONS & WEIGHT


Height Of The Product (Minimum)	83 1/2" (2120 mm)
Adjustable Feet Height	up to 1" (25 mm)
Width Of The Product	35 7/8" (912 mm)
Depth Of Product Without Handle	24 3/8" (620 mm)
Cut-out Height	84" (2134 mm)
Cut-out Width	36" (914 mm)
Cut-out Depth	min 24 3/4" (630 mm)
Net Weight	472 lbs (214 kg)
Gross Weight	518 lbs (235 kg)

FRONT VIEW


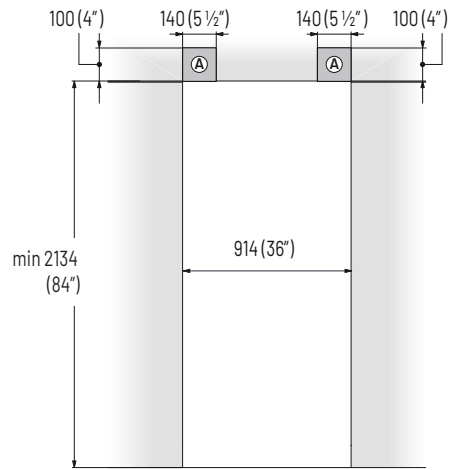


A
Area to be left clear for the anti-tipping brackets


SIDE VIEW

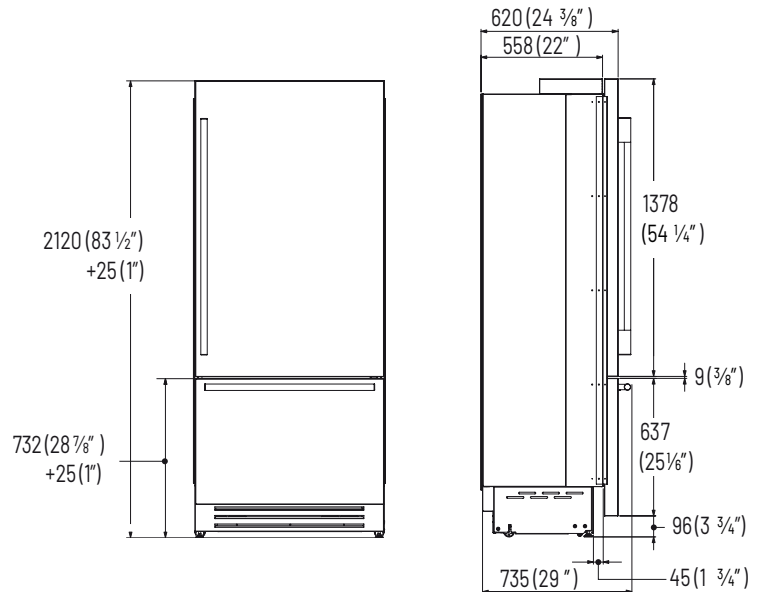


TOP VIEWS

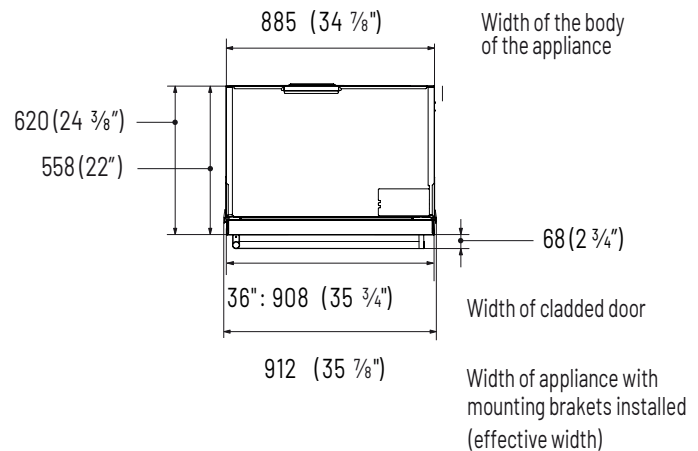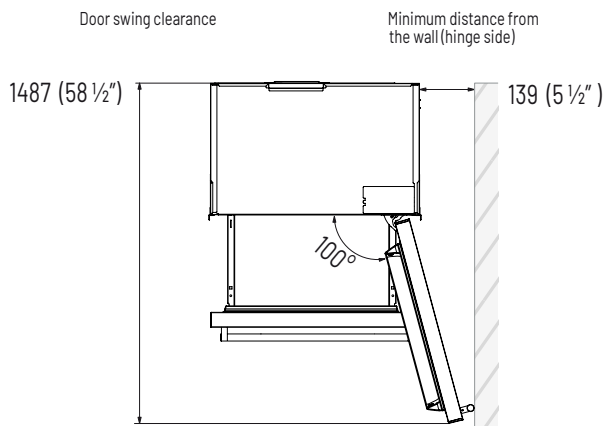

PLINTH SIZE

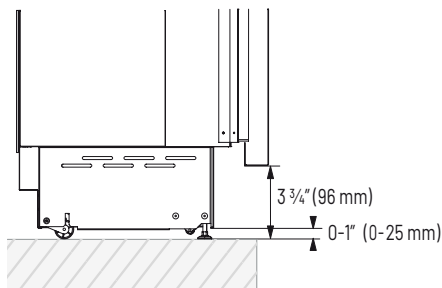

ELECTRICAL CONNECTION

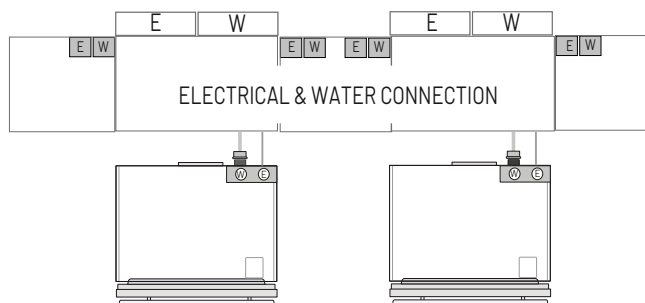

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.