



PRINCIPAL FEATURES

- OptiView™: OptiView LED lights
- ProVent™: Uniform air circulation maintains consistent temperatures throughout the appliance resulting in better food preservation
- Humidity Control: Choose between high, medium and low humidity – particularly important for wine storage
- Total No Frost: No more frost build-up that requires defrosting
- EquiLance™: Achieve a seamless built-in look with Benessi's innovative door hinge

TEMPERATURE RANGES

- Climate Zones 2
- Compartment 1 / Upper Temperature from 39°F (4 °C) to 64°F (18 °C)
- Compartment 2 / Middle Temperature N/A
- Compartment 3 / Low Temperature from 39°F (4 °C) to 64°F (18 °C)

TECHNICAL DETAILS

Total Absorbed Current (A)	2.5
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length	78 3/4" (2 m)
Plug Type	Nema 5-15P
Climate Class	SN/T
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	N/A


GENERAL PROPERTIES

- Equilance Hinge YES
- Soft-Closing Glides NO
- Low Vibration YES
- OptiView (Led Light Spots) YES
- Shelves 13
- Type Of Shelves WOOD
- Door Bins N/A
- Fridge Interior Drawers N/A
- Freezer Drawers N/A
- Evenlift Shelves NO
- Full Extension Shelves 90° Door Opening YES
- Full Extension Drawers 90° Door Opening NO
- Defrost Process AUTOMATIC
- Door Open Alarms YES
- Shopping Fridge NO
- Shopping Freezer NO
- Power Failure Alert YES
- Ice Maker With Water Filter NO
- Water Dispenser With Water Filter NO
- Water Filter Cartridge NO
- Net Capacity 20.8 cuft (590 l)
- Upper Compartment Wine Cellar Capacity (Bottles) 96
- Lower Compartment Wine Cellar Capacity (Bottles) 90

DIMENSIONS & WEIGHT


Height Of The Product (Minimum)	83 1/2" (2120 mm)
Adjustable Feet Height	up to 1" (25 mm)
Width Of The Product	35 7/8" (912 mm)
Depth Of Product Without Handle	24 3/8" (620 mm)
Cut-out Height	84" (2134 mm)
Cut-out Width	36" (914 mm)
Cut-out Depth	min 24 3/4" (630 mm)
Net Weight	428 lbs (194 kg)
Gross Weight	474 lbs (215 kg)

FRONT VIEW


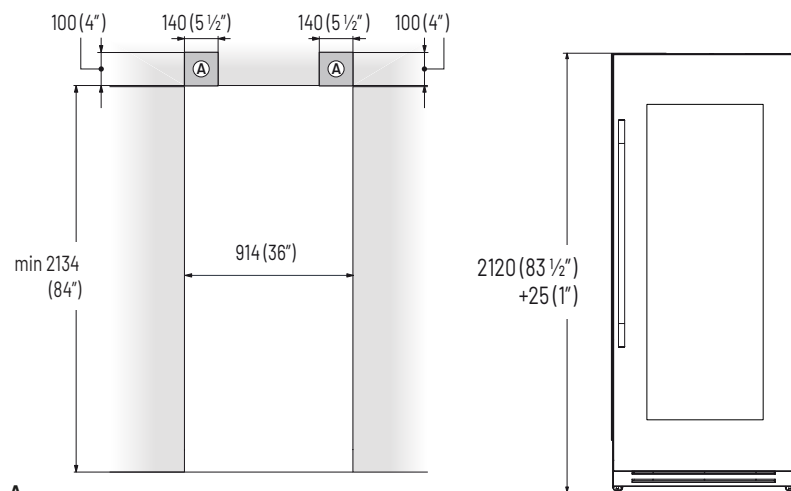


A
Area to be left clear for the anti-tipping brackets


SIDE VIEW

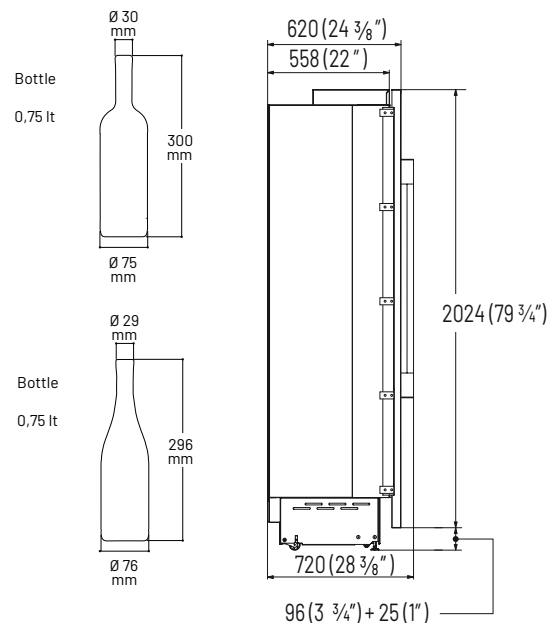


TOP VIEWS

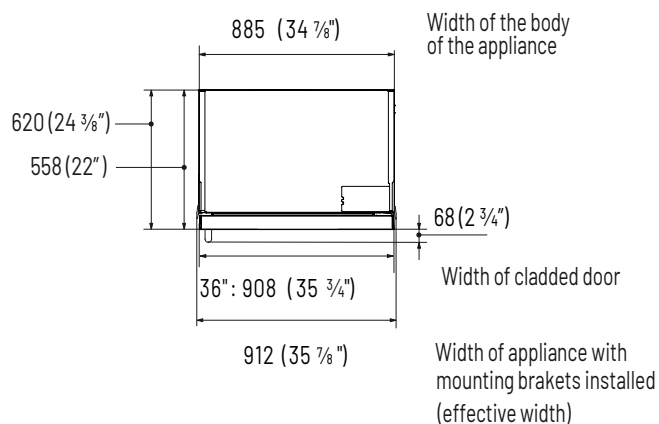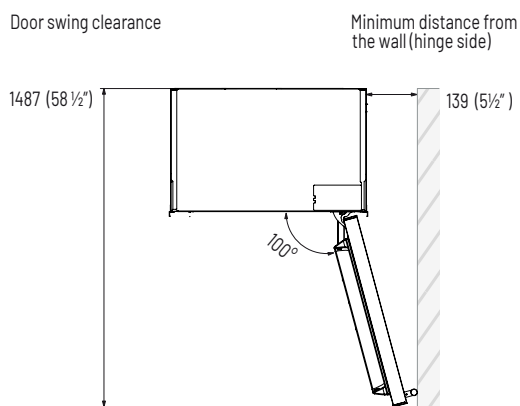

PLINTH SIZE

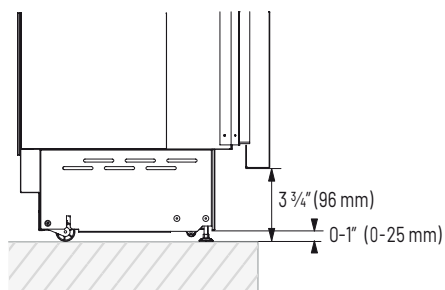

ELECTRICAL CONNECTION

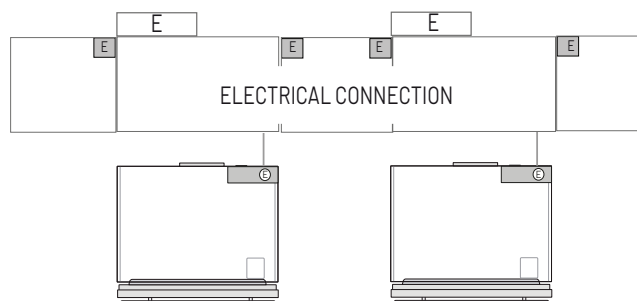

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.