



PRINCIPAL FEATURES

- OptiView™: OptiView LED lights
- EventLift™: Easily rearrange the shelving without removal using the EvenLift system
- ProVent™: Uniform air circulation maintains consistent temperatures throughout the appliance resulting in better food preservation
- Antibacterial Stainless Steel Interiors Drawers: Achieve the highest food quality by storing food in the stainless steel interior drawer that shields against the spread of bacteria
- Total No Frost: No more frost build-up that requires defrosting
- Ice Maker: Get high-quality ice cubes in a variety of sizes
- Water Filter: Get pure water and crystal-clear ice thanks to the integrated water filter and ice maker
- SuperIce™: Temporarily increase ice cube production for gatherings and parties
- Ice Size: Easily switch between medium and large ice cubes
- EquiLance™: Achieve a seamless built-in look with Benessi's innovative door hinge


TECHNICAL DETAILS	
Total Absorbed Current (A)	2.5
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length	78 3/4" (2 m)
Plug Type	Nema 5-15P
Climate Class	SN/T
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	3/4" NPT (1/4" elbow adapter)

GENERAL PROPERTIES	
• Equilance Hinge	YES
• Soft-Closing Glides	YES
• Low Vibration	YES
• OptieView (Led Light Spots)	YES
• Shelves	2
• Type Of Shelves	GLASS
• Door Bins	2
• Fridge Interior Drawers	N/A
• Freezer Drawers	3
• Evenlift Shelves	NO
• Full Extension Shelves 90° Door Opening	NO
• Full Extension Drawers 90° Door Opening	YES
• Defrost Process	AUTOMATIC
• Door Open Alarms	YES
• Shopping Fridge	NO
• Shopping Freezer	YES
• Power Failure Alert	YES
• Ice Maker With Water Filter	YES
• Water Dispenser With Water Filter	NO
• Water Filter Cartridge	YES
• Net Capacity	7.9 cuft (223 l)

TEMPERATURE RANGES	
• Climate Zones	1
• Compartment 1 / Upper Temperature	from 9 °F (-13 °C) to -9 °F (-23 °C)


DIMENSIONS & WEIGHT	
Height Of The Product (Minimum)	83 1/2" (2120 mm)
Adjustable Feet Height	up to 1" (25 mm)
Width Of The Product	17 7/8" (455 mm)
Depth Of Product Without Handle	24" (610 mm)
Cut-out Height	84" (2134 mm)
Cut-out Width	18" 457 mm)
Cut-out Depth	min 24" (610 mm) + panel thickness for flush install
Net Weight	282 lbs (128 kg)
Gross Weight	326 lbs (148 kg)

FRONT VIEW

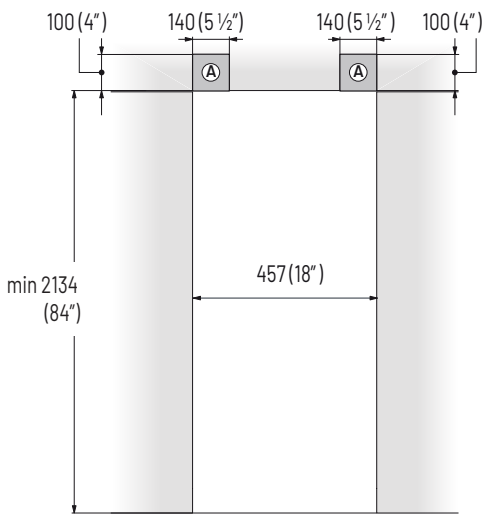


A
Area to be left clear for the anti-tipping brackets

SIDE VIEW

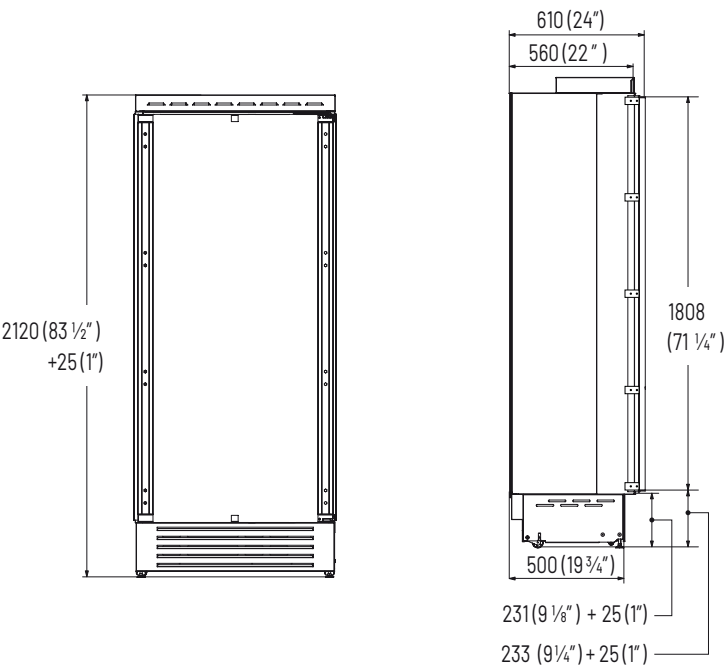


CUSTOM PANELS INFORMATION

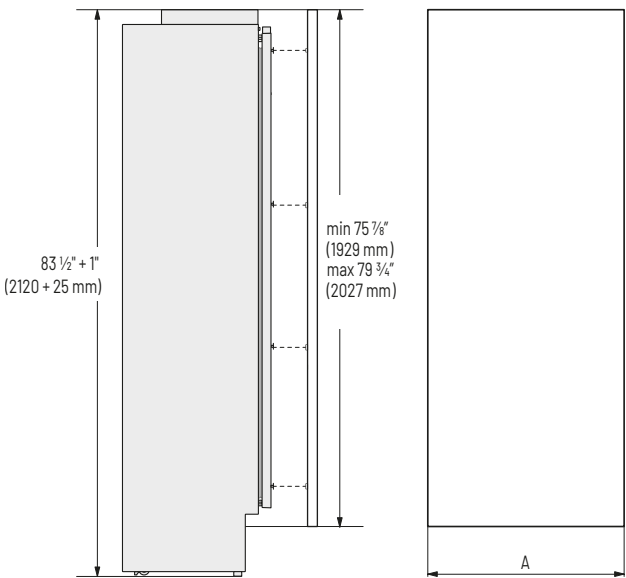

Serie	A
18"	17 5/8" (451 mm)

PLINTH SIZE

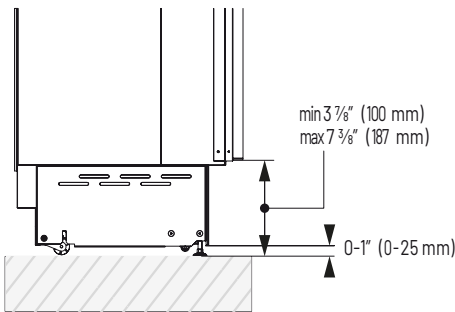



INTEGRATED PANEL RECOMMENDATIONS

Panels with thickness ranging between 3/4" in (18 mm) and 1 1/8" in (28 mm)


Door Panels Weight Max 75 lbs (34 kg)

Drawer Panels Weight Max N/A lbs (N/A kg)

TOP VIEWS

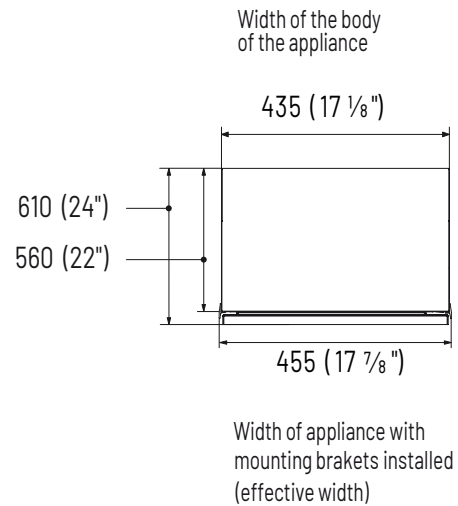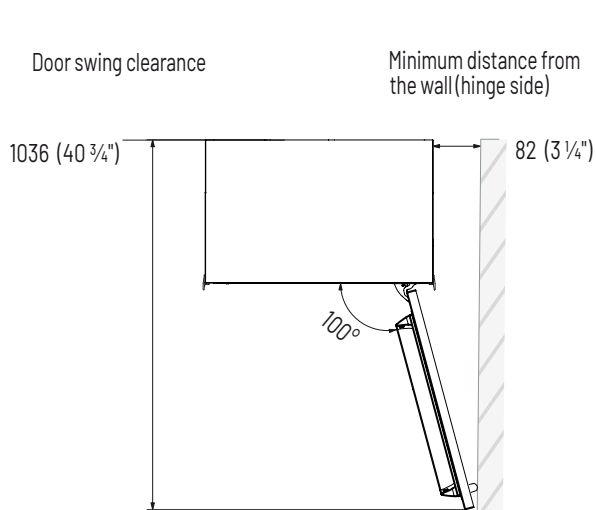

ELECTRICAL CONNECTION

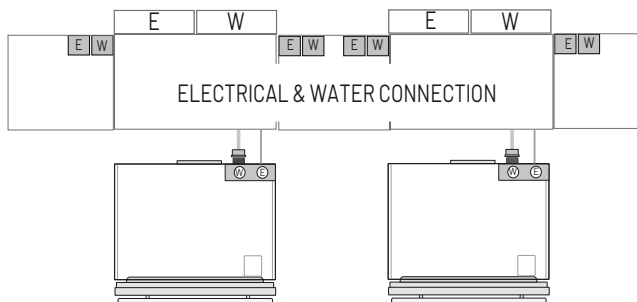

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.