



PRINCIPAL FEATURES

- Stainless Steel AISI 304 structure: High-quality material, corrosion-resistant, ideal for professional and premium domestic use.
- Antibacterial Interior: Hygienic surfaces that preserve freshness, safety, and cigars quality.
- OptiView™: Diffuse, uniform LED lighting.
- Active Safety: Visual and acoustic alerts.
- 100% Total No Frost: Automatic system that prevents ice formation and ensures impeccable humidity control.
- Variable Speed Compressors: Precise temperature control, reduced vibrations, and maximum efficiency.
- Easy Installation: Adjustable feet and rear wheels.
- One climate zone: Precise temperature control for optimal cigar preservation.
- Canaletto walnut wood drawers: Elegant, sturdy, and equipped with soft-closing slides, they ensure smooth and silent operation while enhancing the display of your collection.
- Fully Integrated / Built in: Designed to integrate seamlessly into your décor, with a clean and minimal aesthetic.
- Triple-layer bronzed glass door: Total protection against UV rays and external temperature fluctuations.
- Reversible door: Maximum installation flexibility, adaptable to any configuration.

TECHNICAL DETAILS

Total Absorbed Current (A)	1.5
Voltage (V)	220 - 240V
Frequency (Hz)	50/60 Hz
Power Cord Length	2 mm
Plug Type	Tipo F (Schuko) 16A IEC13 10A
Climatic Class	SN/T
Noise level (dB)	41
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	N/A

GENERAL PROPERTIES

• Reversible door	YES
• Equilance hinge	NO
• Soft-Closing glides	YES
• Low vibration	YES
• OptiView (Led Light Spots)	YES
• Type Of Shelves	N/A
• Full Extension Shelves 90° Door Opening	YES
• Full Extension Drawers 90° Door Opening	YES
• Defrost Process	AUTOMATIC
• Door Open Alarms	YES
• Shopping Fridge	NO
• Shopping Freezer	NO
• Power Failure Alert	YES
• Ice Maker With Water Filter	NO
• Humidity control	NO
• Active carbon filter	YES
• Air filter control	YES
• Volume Compartment 1 (L)	143
• Total Net Volume (L)	143
• Total Gross Volume (L)	145
• New Energy Label class	G
• Energy consumption (kWh/year)	122


TEMPERATURE RANGES

• Climatic compartments	1
• Compartment 1 / Upper temperature (°C)	from 4 to 18
• Low temp zone	NO
• Dual zone	NO

DIMENSIONS & WEIGHT

Height Of The Product (closed weels)(mm)	865
Adjustable Feet Height (mm)	25
Width Of The Product (mm)	598
Depth Of Product Without Handle (mm)	572
Wall cavity Height (mm)	870
Wall cavity Width (mm)	600
Wall cavity depth (mm)	600
Net Weight (kg)	55
Gross Weight (kg)	70




PRODUCT SPECIFICATIONS AND DIMENSIONS

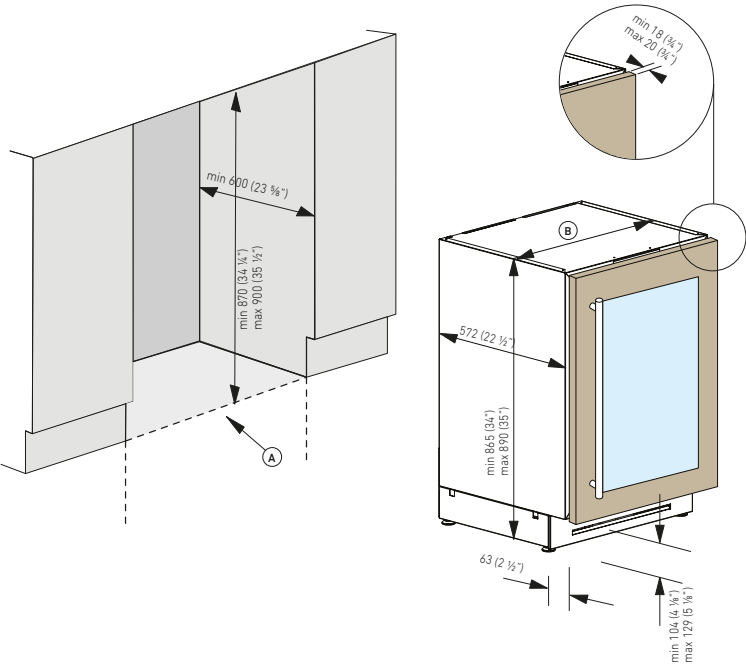

TECHNICAL DATA	
Niche Width A (mm)	600
Unit Width B (mm)	598
Unit Width with lateral frames C (mm)	598

FRONT VIEW

SIDE VIEW

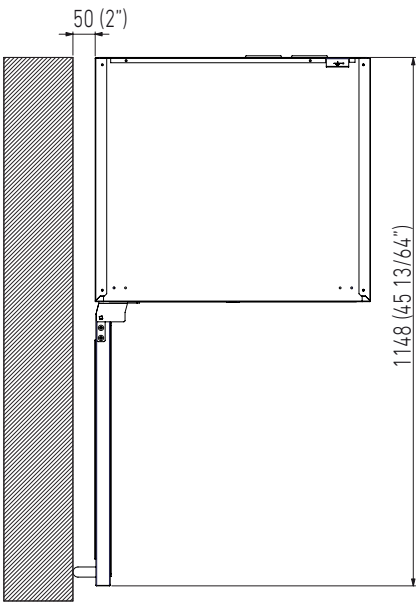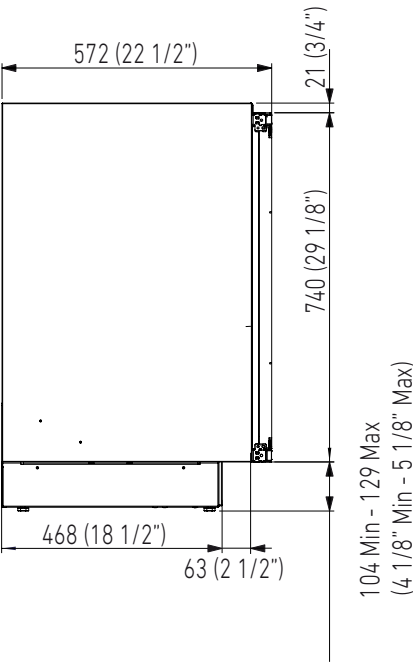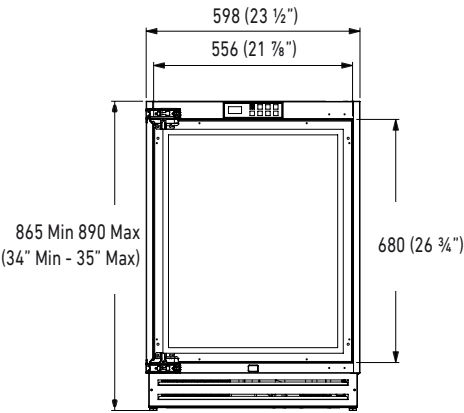


For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.



Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment

CUSTOM PANELS INFORMATION

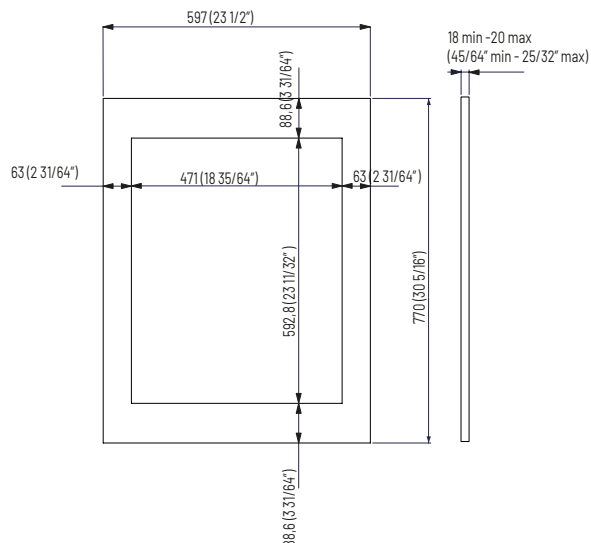


INTEGRATED PANEL RECOMMENDATIONS

Panels with thickness ranging between 18 mm and 20 mm




Door Panels Weight Max	10 kg
Drawer Panels Weight Max	N/A kg

ELECTRICAL CONNECTION

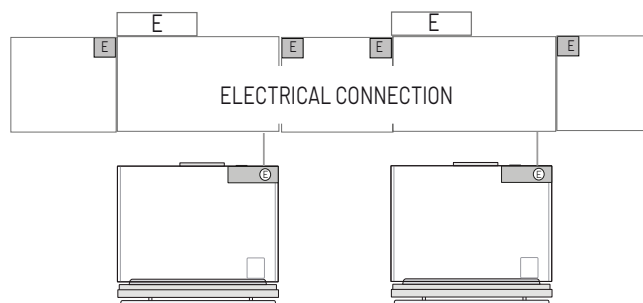

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.

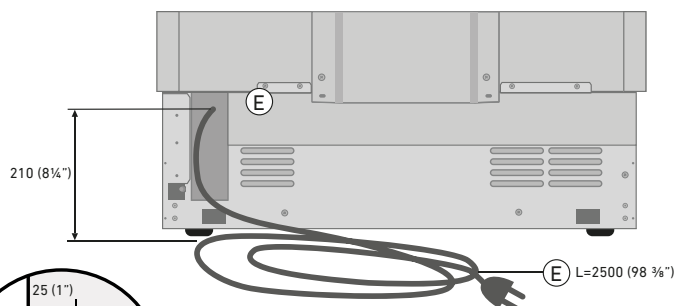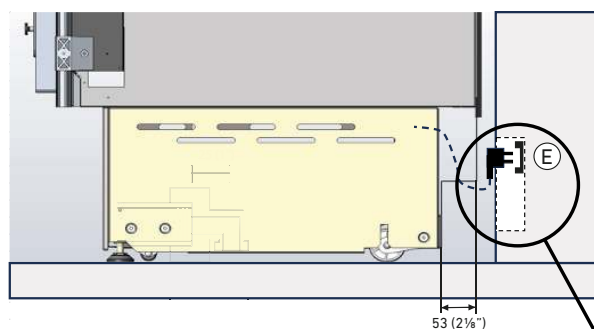

For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.