





PRINCIPAL FEATURES

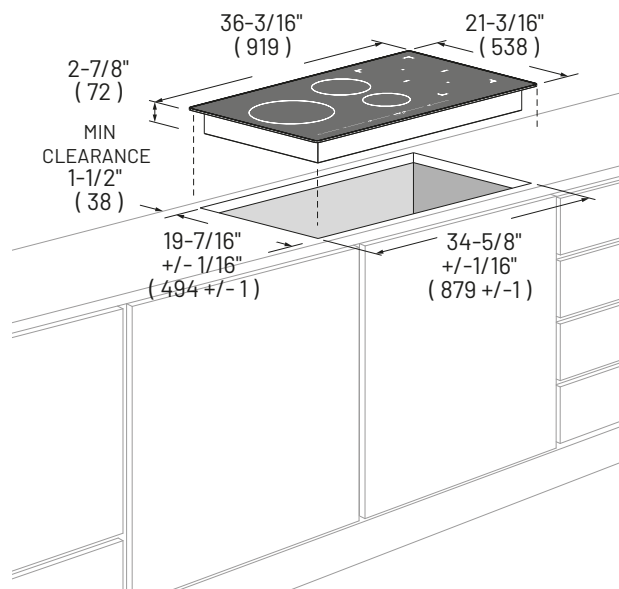

Easy Clean Ceramic Glass

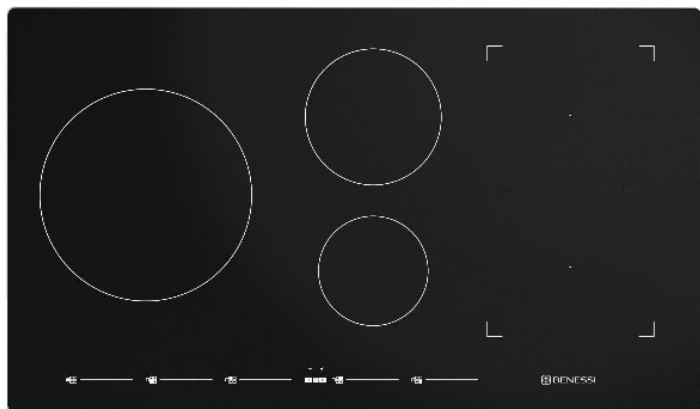

Slide Touch Control



Pan Detection system



Bridge Zone



Residual Heat Sensor



Frame Creative



Digital Minute Minder

OPTIONAL ACCESORIES

- BINDUKIT4 Pot Induction Adapter

SPECIFICATIONS

INDUCTION COOKTOP

5 Induction cooking zones
11" large cooking zone
Bridge zone on the right side
Elegant Ceramic glass surface
Premium induction technology for unsurpassed performance
Melt and Simmering Functions
Residual heat and Power on Indicators
Digital Minute Minder

Pot Detection System
Child Lock Function
Independent timer for each zone
Pause Function
Booster function for each cooking zone
Failure Codes Indication
Digital Display for Power Level
Automatic Heat-up Time

MODEL CODE	36" INDUCTION COOKTOP - BKIC36MAST			
Series and Finish	700 Series - Ceramic glass with aluminum frame			
CONTROL PANEL				
Control Type	Touch Control			
COOKTOP				
Type	INDUCTION			
Cooking Surface	Ceramic Glass			
Slider Touch Control for Power Setting	•			
Digital Display for Power Level	•			
INDUCTION COOKTOP FEATURES				
Pot Detection System	•			
Bridge double zone	•			
Power Levels	1 to 9			
Warming Function 158°F / 70°C	•			
Booster/Fast Boil Function for Each Zone	•			
Auto-boil and Reduce for Each Zone	•			
Residual Heat Indication	•			
Individual Timer for each Zone	•			
Child Lock	•			
Key Lock (LED)	•			
Pause/recall (LED)	•			
General ON/OFF Key (LED)	•			
Cooking Zones	5			
Burners types (Front-L) - Power (Max/Booster)	Inductor	11"	(280 mm)	2300W / 3600W
Burners types (Rear Central) - Power (Max/Booster)	Inductor	7"	(180 mm)	1850W / 3000W
Burners types (Front Central) - Power (Max/Booster)	Inductor	5 - 3/4"	(145 mm)	1400W / 2200W
Burners types (Rear/Front-R) - Power (Max/Booster)	(Octagonal) Inductor	7 - 1/2" x 8 - 1/2"	(190 mm x 220 mm)	2000W / 3600W
DIMENSIONS/WEIGHT				
Overall dim - Width	36 - 3/16"		(919 mm)	
Overall dim - Height	4"		(100 mm)	
Overall dim - Depth	21 - 3/16"		(538 mm)	
Cut-out - Width (Tolerance)	34 - 5/8" tol. 1/16"		(879 mm) - (tol. 1 mm)	
Cut-out - Height	2 - 5/8" + conduit 1 - 1/16"		(67 mm) + conduit (27 mm)	
Cut-out - Depth (Tolerance)	19 - 3/8" tol. 1/16"		(492 mm) - (tol. 1 mm)	
Gross Weight	55 lbs		(25 kg)	
POWER / RATINGS (208/240 V, 60 HZ)				
kW / Amps rating at 240V, 60Hz	10.8kW - 45A			
kW / Amps rating at 208V, 60Hz	9.40kW - 45A			
Power Cable	Conduit			
INSTRUCTIONS FOR USE				
Use & Care Manual / Installation Manual	English / French / Spanish			