




PRINCIPAL FEATURES



Digital Controls

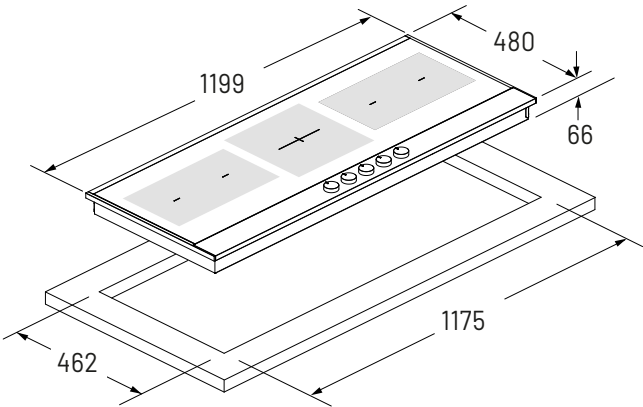

Residual Heat Sensor



Pan Detection system



Bridge Zone



Warming Function



Booster



Easy Clean Ceramic Glass

DESCRIPTION

The 48" Induction cooktop is the perfect blend of cutting-edge technology and sophisticated design. Crafted from solid 15 mm satin-finished aluminum, it stands out for its elegant recessed knobs. Powered by innovative Quantum induction technology, it guarantees high performance, reduced energy consumption, and fast, precise cooking. The cooktop features five cooking zones, each controlled via dedicated knobs, including a high-power 28 cm zone and two zones with a bridge system ideal for larger cookware. Each zone offers adjustable power levels from 1 to 9, along with dedicated functions such as Keep Warm, Rapid Heat, and BOOST. Thanks to its refined design and advanced professional functions, the cooktop is the ideal choice for those seeking an appliance that combines aesthetics and performance.

FEATURES

- Matte Black Anodized Aesthetics
- Metal Control Knobs with Matte Black Finish
- Glass Ceramic Surface
- 5 Cooking Zones (2 vertical bridge zones)
- Pan Detection Sensor
- 9 Power Levels
- BOOST Rapid Preheating
- Child Safety lock
- Keep Warm Function

MODEL CODE		48" INDUCTION COOKTOP - BKIC48			
Type		120 Induction Hob			
Aesthetics		Matte Black Anodized			
Surface		Glass Ceramic			
INDUCTION PERFORMANCE					
Induction features		Pan Detection System		Child Lock	
		Cooling System		Cooking Level Indicator	
Knobs for power adjustment		•			
Power levels		1-9			
Digital display indicating power level		•			
Melting function at 45°C		•			
Keep warm function at 70°C		•			
Simmering function at 95°C		•			
Booster / Rapid boil function for each zone		•			
Rapid heating		•			
Bridge function		•			
Rear Right		•			
COOKING ZONE FEATURES		Dimensions		Power	
5 Cooking Zones (2 Bridge Zones)					
1 Front Left	Octa Induction	220 x 180 mm	Level 9 - 2100W	Booster - 3700W	
2 Rear Left	Octa Induction	220 x 180 mm	Level 9 - 2100W	Booster - 3700W	
3 Central Dual Circuit	Round Induction	Ø 280 mm	Level 9 - 2600W	Booster - 5500W	
4 Front Right	Octa Induction	220 x 180 mm	Level 9 - 2100W	Booster - 3700W	
5 Posteriore Destro	Octa Induction	220 x 180 mm	Level 9 - 2100W	Booster - 3700W	
DIMENSIONS					
Width		1199 mm			
Height (Without power cable)		66 mm			
Depth		480 mm			
Cut-out Width		1175 mm			
Cut-out Depth		462 mm			
ELECTRICAL SPECIFICATIONS					
Maximum Electrical Power (W)		11040W			
Conduit		•			