


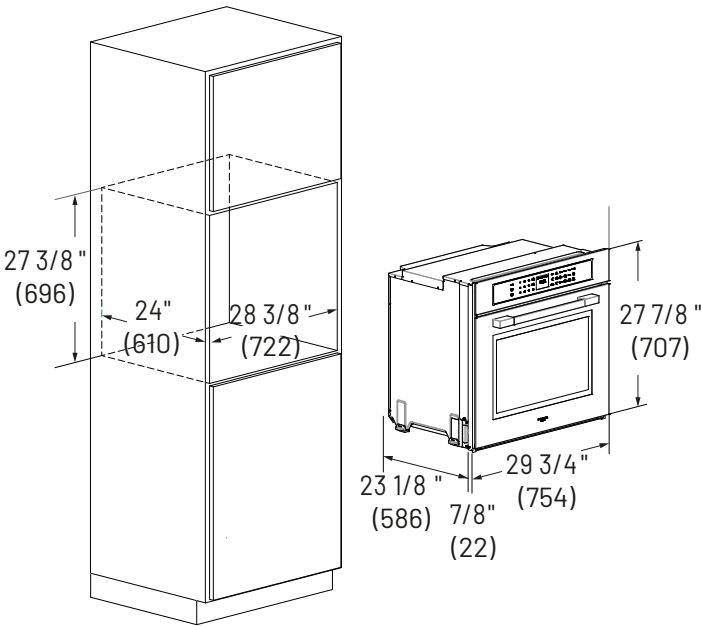

PRINCIPAL FEATURES

- Multi-level Cooking
- Pizza Cooking Mode 590°F
- Airfry
- Self Clean Oven
- Creactive cooking system
- TFT Display
- Meat Probe
- Cool Touch Door
- Dual Convection
- Fast Pre-Heat
- Soft Closing
- 1 Telescopic Rack

INCLUDED ACESORIES

- B2x 2006270
  - B1x FMTR630
  - B1x SF0866396
  - B42105652
  - BSF3942P96
  - B12541020

Chromed racks

Telescopic racks

Enameled broiler pan

Enameled Air Fry pan

Enameled Anti-splash

Meat Probe

OPTIONAL ACESORIES

- BFMTR630

30"Telescopic Rack

DESCRIPTION

The 30" oven combines style and functionality, transforming your kitchen into a culinary hub. Finished in our exclusive matte black finish, its contemporary design complements any kitchen while delivering reliable performance. With preset cooking functions, self-cleaning capabilities, and a dual convection system, meal prep is efficient and easy. Safety features include child locks and cool-touch doors, while the high-performance multi-pass broiler ensures superior heat distribution. With oversized capacity, this oven handles everything from family meals to dinner parties, blending luxury, convenience, and innovation.

FEATURES

- Full Touch Controls
  - Display TFT 3.5"
  - 4 Heat-resistant Glass Panel
  - Cool Touch Door
  - Soft Closing Door
  - Interior Halogen Light
  - Preset Default Temperature
  - Setting Weight kg/lb
  - Display Brightness Setting (ON/OFF Condition)

- Beeper Volume Setting
  - Display Control Lock
  - Sabbath Mode
  - 12/24-Hour Clock Formats
  - Automatic Fast Preheat
  - Temperature Display °C / °F
  - Meat Probe
  - Event Log (for Service)

| MODEL CODE                              | 30" TOUCH CONTROL SELF CLEAN OVEN - BKOBM30                        |            |
|-----------------------------------------|--------------------------------------------------------------------|------------|
| GENERAL DETAILS                         |                                                                    |            |
| Finish                                  | Matte Black                                                        |            |
| Control Type                            | Creactive Electronic Touch Control                                 |            |
| Display                                 | 3.5" TFT                                                           |            |
| Language                                | English (USA) / English (UK) / French / Spanish / Italian / German |            |
| Oven Type                               | Dual True Convection                                               |            |
| Temperature (min - max), °F (°C)        | 170 - 550                                                          | (75 - 290) |
| Soft Closing                            | Yes                                                                |            |
| Rack Positions                          | 6                                                                  |            |
| Interior Lights                         | 3 x 20 W Halogen                                                   |            |
| Pyrolytic Self Clean                    | Yes                                                                |            |
| CAPACITY                                |                                                                    |            |
| Volume (each), cu. ft. (L)              | 4.34                                                               | (123)      |
| Useable Width, in. (mm)                 | 24-13/16                                                           | (630)      |
| Useable Height, in. (mm)                | 16-15/16                                                           | (430)      |
| Useable Depth, in. (mm)                 | 17-7/8                                                             | (454)      |
| DIMENSIONS / WEIGHT                     |                                                                    |            |
| Product Width, in. (mm)                 | 29-3/4                                                             | (754)      |
| Product Height, in. (mm)                | 27-7/8                                                             | (707)      |
| Product Depth, in. (mm)                 | 23-1/8                                                             | (586)      |
| Cutout Width, in. (mm)                  | 28-3/8                                                             | (722)      |
| Cutout Height (min), in. (mm)           | 27-3/8                                                             | (696)      |
| Cutout Depth (min), in. (mm)            | 24                                                                 | (610)      |
| Net Weight, lbs. (kg)                   | 160                                                                | (73)       |
| POWER / RATINGS (240 V, 60 Hz)          |                                                                    |            |
| Broil Upper Heating Element             | 3500 W                                                             |            |
| Upper Auxiliary Element                 | 1032 W                                                             |            |
| Concealed Lower Bake Element            | 3000 W                                                             |            |
| Convection Element                      | 2 x 1300 W                                                         |            |
| TECHNICAL DETAILS                       |                                                                    |            |
| kW / Amps rating at 120-240 V, 60 Hz    | 3.70 kW - 15.4 A                                                   |            |
| kW / Amps rating at 120-208 V, 60 Hz    | 3.50 kW - 16.8 A                                                   |            |
| Power Cable                             | 4-Wire Conduit - Hardwire Connection                               |            |
| Power Cable Length, in. (mm)            | 56                                                                 | (1422)     |
| Electrical Circuit                      | 240 / 208 V - 60 Hz - 40 A                                         |            |
| INSTRUCTIONS FOR USE                    |                                                                    |            |
| Use & Care Manual / Installation Manual | English / French / Spanish                                         |            |
| WARRANTY                                |                                                                    |            |
| Limited Warranty                        | Parts and Labor (2-year)                                           |            |