



PRINCIPAL FEATURES

- Truly built in with Stainless Steel inner liner.
- Large and easy to read digital display.
- Soft close Hettichi hinge.
- Touch Electronic control.
- Full Extension Drawers.
- Soft close metal drawers.
- Metal door bins.
- Refrigerator adjustable temp from +35 °F (2 °C) to +46 °F (8 °C).
- Chiller zone adjustable temp from +30 °F (-1 °C) to +41 °F (5 °C).
- Sabbath mode, Holiday mode, ECO mode, Showroom mode.
- Height adjustable.
- Full size Sky LED Light and side LED lighting.
- Metal cooling with real S.S back panel.
- 3D door installation adjustment, for easy door panel alignment.
- Ultra quiet 41 dB(A).
- Appliance leveling from the front and rear.
- Interior filtered water dispenser.

TECHNICAL DETAILS

Supply Voltage, V/Hz	110-127 V ~ 60 HZ 2,5 A
Rated Current, A	2
Noise Level, dBA	41

GENERAL PROPERTIES

• Cooling System	Total No frost Cooling
• Cooling System	Electronic Control
• Control Display Type	LED
• Automatic Defrost	Yes
• Water dispenser	Yes
• Interior Lighting	Full size Sky LED Light and side LED lighting
• Spill-proof Shelves	3
• Crisper	4 (1 Crisper + 3 Chiller zone)
• Door Racks	3 (2+1 gallon Rack)
• Compressor	Variable speed with inverter
• Fan Ventilation	Yes
• Air Duct	ABS with stainless steel cover
• Energy Star Qualified	Yes
• Climate Class	SN-T
• Annual Energy Consumption, kwh/year	314
• Refrigerant	R600a
• Total Net Volume	15.93 cu-ft (451L)


TEMPERATURE RANGES

• Refrigerator	from +35 °F (2 °C) to +46 °F (8 °C).
• Chiller zone	from +30 °F (-1 °C) to +41 °F (5 °C).


DIMENSIONS & WEIGHT

Product Dimension HxWxD, in (mm), depth without door panel.	83 7/16" x 29 3/4" x 23 5/16" (2123 x 756 x 592)
Package HxWxD, in (mm)	90 9/16" x 32 1/4" x 26 3/8" (2300 x 820 x 670)
40' HC Loading Quantity	45
Net weight (kg)	152
Gross weight (kg)	171
Wood panel cutout dimensions (HxWxD) in (mm), depth with panel and without handle	84" x 30" x 25" (2134 x 762 x 635)


WOOD PANEL CUTOUT DIMENSION AND INSTALLATION CLEARANCE

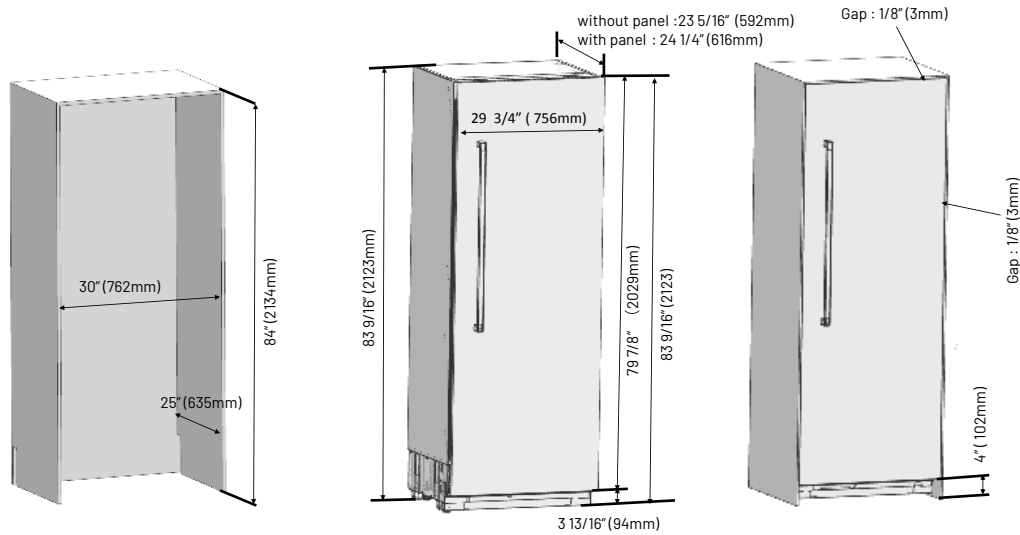




INSTALLATION DIMENSIONS

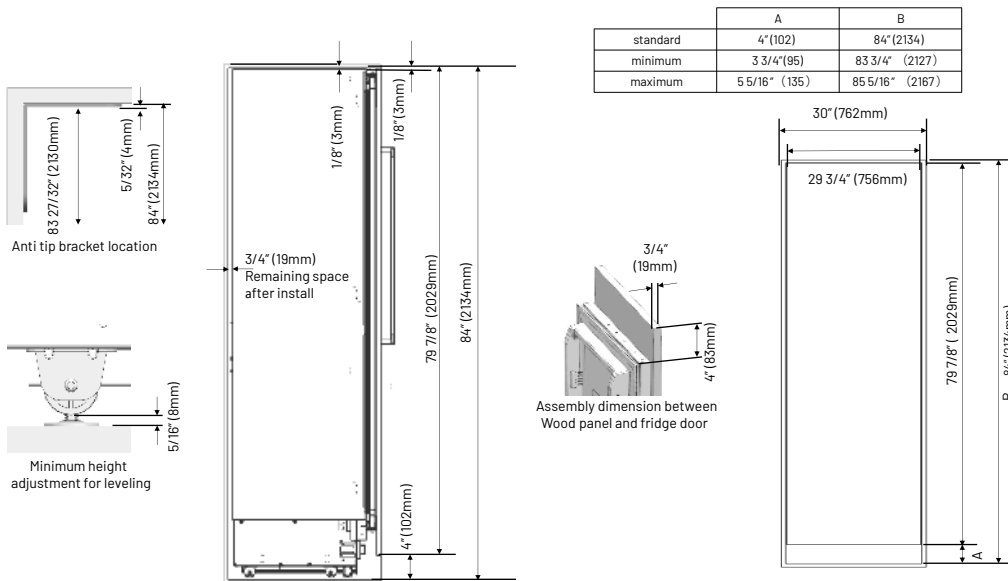

ANTI TIP BRACKETS

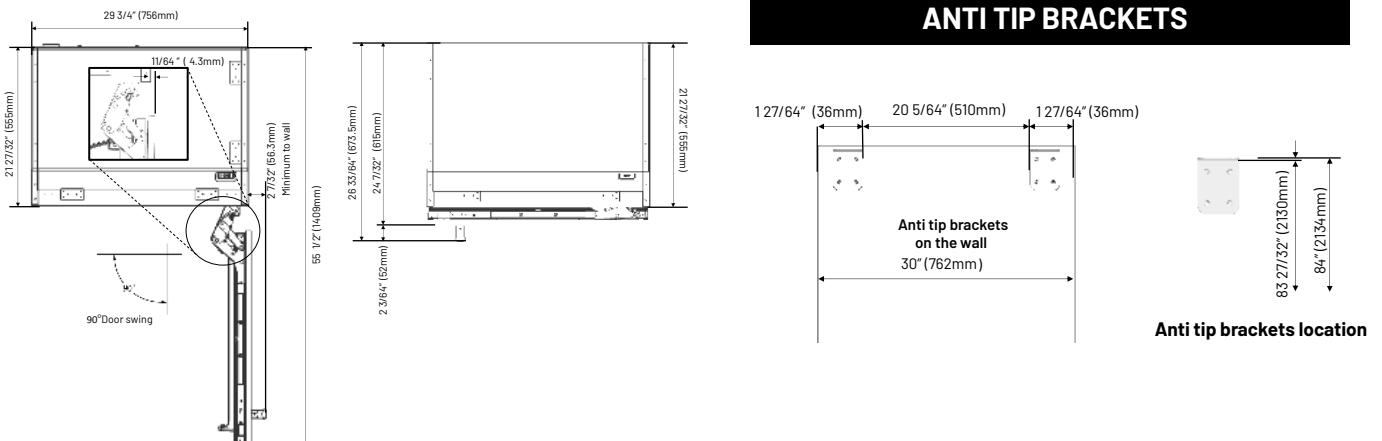


PLUMBING AND ELECTRICAL LOCATION

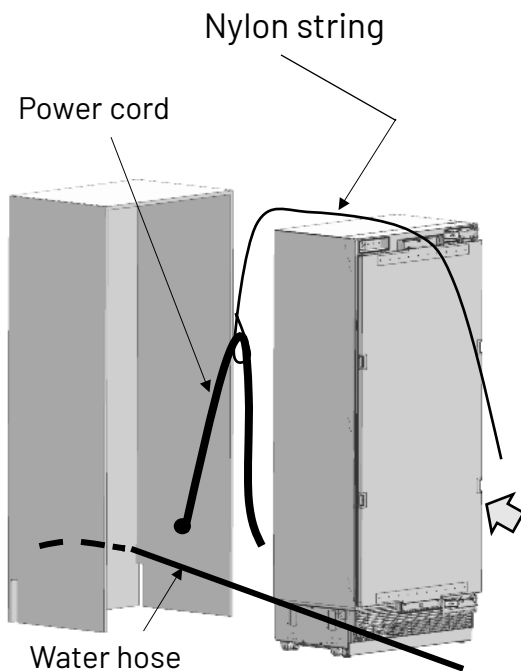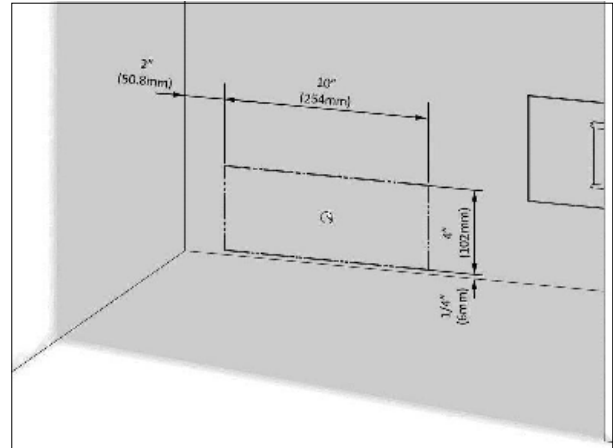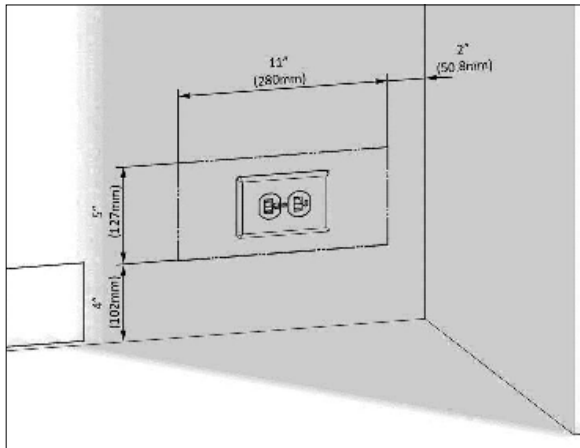

Power cord installation

Use nylon string to prevent the cable from getting jammed.

Keep open for Power cord and Water line if necessary

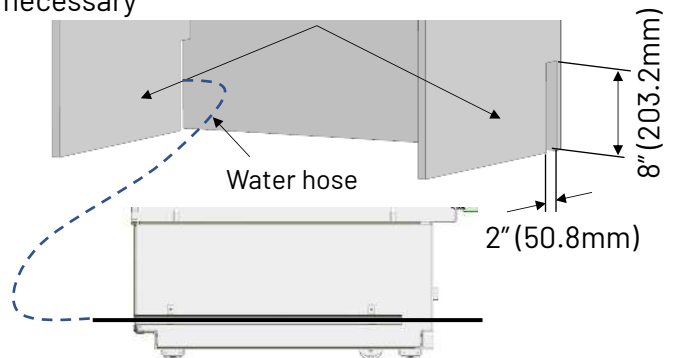

Plumbing

For 1/4" braided stainless units with ice maker and water

Water hose installation

a minimum length of 60" (1.5 meters) and a diameter of 1/4" for water connections