

BKR36P

36" All fridge Built-in Column Total NoFrost - Stainless Steel Inner Liner

BENESSI



PRINCIPAL FEATURES

- True integrated panel ready installation SS inner liner.
- Large and easy to read digital display.
- Soft close Hettichi hinge.
- Touch electronic control.
- Full extension drawers.
- Soft close metal drawers.
- Metal door bins.
- Refrigerator adjustable temp from +35 °F (2 °C) to +46 °F (8 °C).
- Chiller zone adjustable temp from +30 °F (-1 °C) to +41 °F (5 °C).
- Sabbath mode, Holiday mode, ECO mode, Showroom mode.
- Height adjustable.
- Full size top LED panel and side LED lighting.
- Metal cooling with real S.S back panel.
- 3D door installation adjustment, for easy door panel alignment.
- Ultra quiet 41 dB (A).
- Appliance leveling from the front and rear.
- Interior filtered water dispenser.

TECHNICAL DETAILS

Supply Voltage, V/Hz	110-127 V ~ 60 HZ 3,00 A
Rated Current, A	2
Noise Level,dBA	41

GENERAL PROPERTIES

• Cooling System	Total No frost Cooling
• Cooling System	Electronic Control
• Control Display Type	LED
• Automatic Defrost	Yes
• Water dispenser	Yes
• Interior Lighting	Full size Sky LED Light and side LED lighting
• Spill-proof Shelves	3
• Crisper	4 (1 Crisper + 3 Chiller zone)
• Door Racks	3 (2+1 gallon Rack)
• Compressor	Variable speed with inverter
• Fan Ventilation	Yes
• Air Duct	ABS with stainless steel cover
• Energy Star Qualified	Yes
• Climate Class	SN-T
• Annual Energy Consumption, kwh/year	318
• Refrigerant	R600a
• Total Net Volume	20.1 cu-ft (569L)

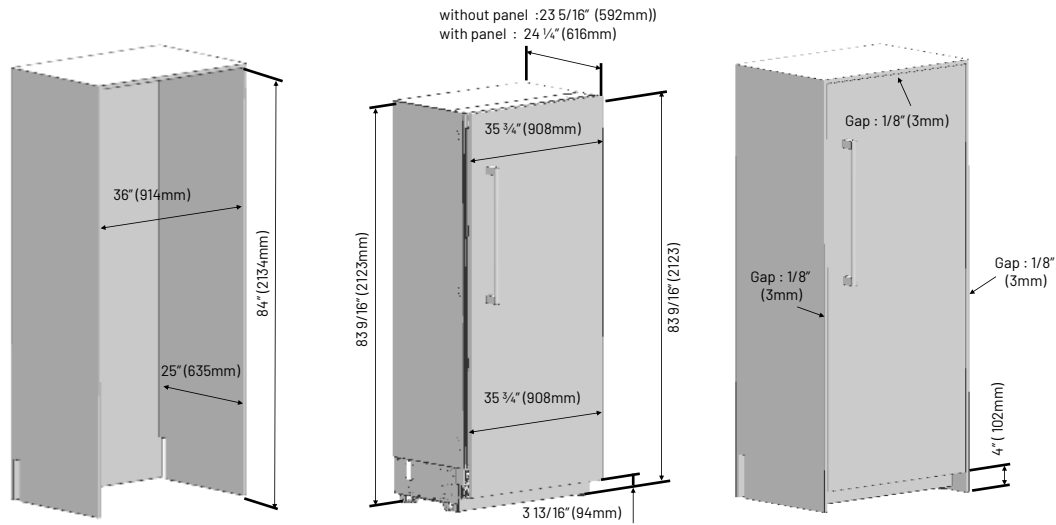
TEMPERATURE RANGES

• Refrigerator	from +35 °F (2 °C) to +46 °F (8 °C).
• Chiller zone	from +30 °F (-1 °C) to +41 °F (5 °C).

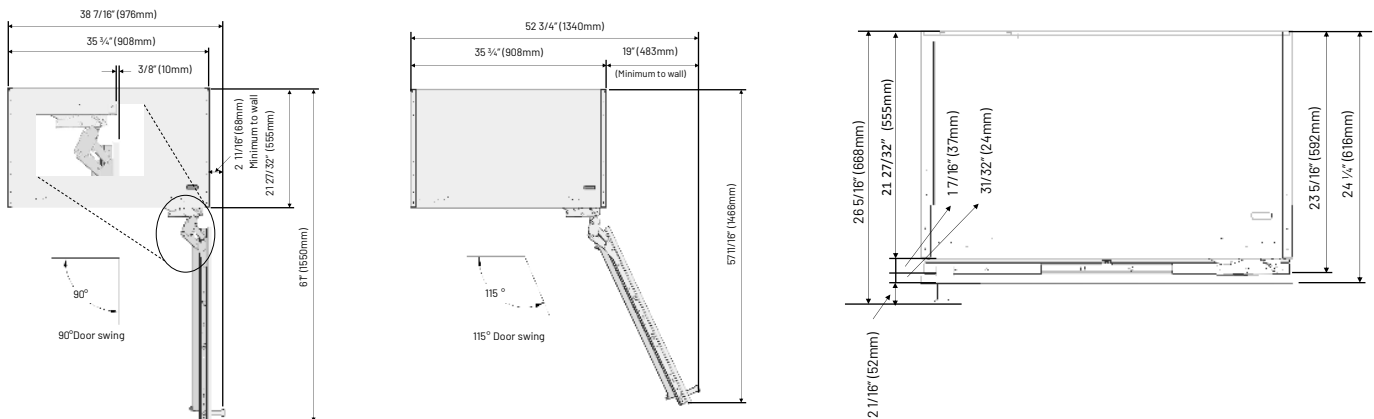
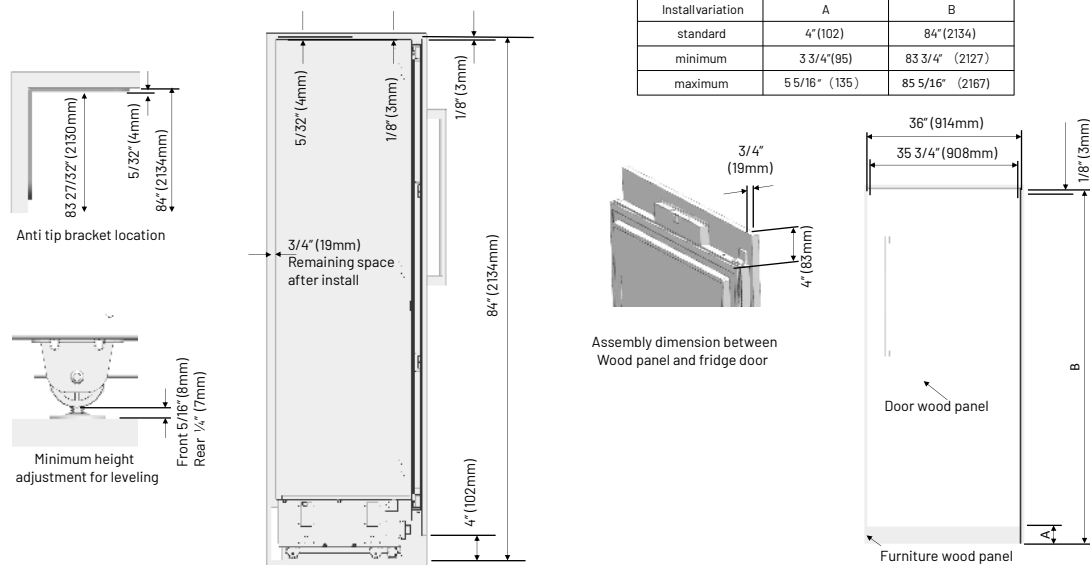
DIMENSIONS & WEIGHT

Product Dimension HxWxD, in (mm) depth without door panel.	83 9/16" x 35 3/4" x 23 5/16" (2123 x 908 x 592)
Package HxWxD, in (mm)	90 9/16" x 38 1/4" x 26 5/8" (2300 x 972 x 670)
40' HC Loading Quantity	36
Net weight, (kg)	161
Gross weight, (kg)	181
Wood panel cutout dimensions (HxWxD) in (mm), depth with panel and without handle	84" x 36" x 25" (2134 x 914 x 635)

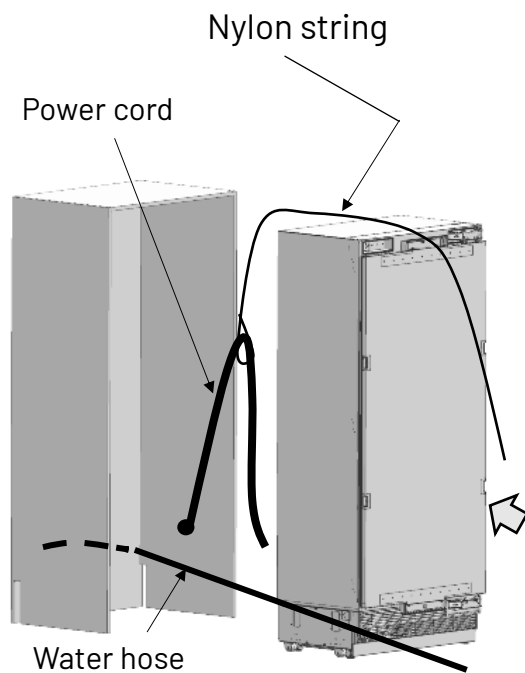
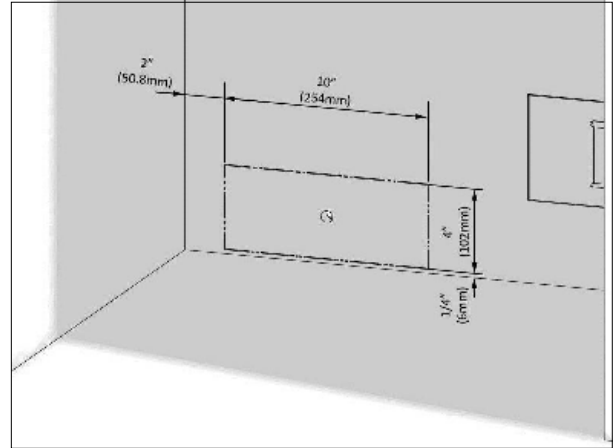
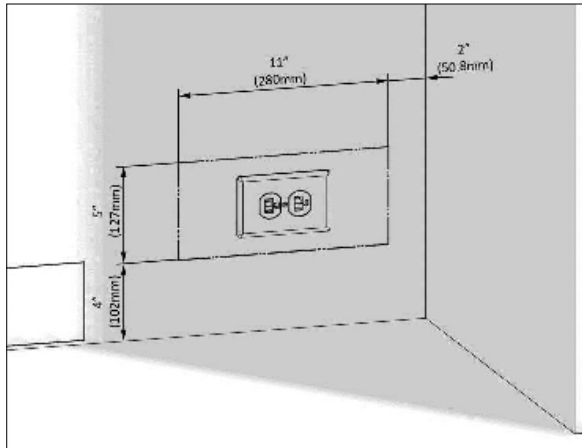
WOOD PANEL CUTOUT DIMENSION AND INSTALLATION CLEARANCE



INSTALLATION DIMENSIONS

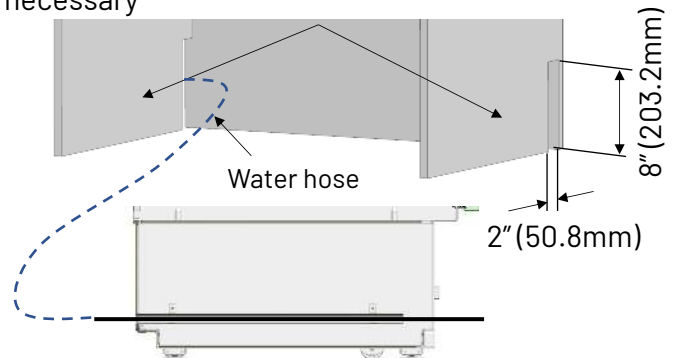


PLUMBING AND ELECTRICAL LOCATION

**Power cord installation**

Use nylon string to prevent the cable from getting jammed.

Keep open for Power cord and Water line if necessary

**Plumbing**

For 1/4" braided stainless units with ice maker and water

Water hose installation

a minimum length of 60" (1.5 meters) and a diameter of 1/4" for water connections