



PRINCIPAL FEATURES

- Aisi 304 stainless steel body
- Stainless steel interior finish
- Aisi 304 stainless steel anti-bacteria interior
- Optiview: multi - LED light array (top interior) provides excellent illumination to the entire interior
- Soft close drawer
- Full color TFT smart display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Insulated variable speed compressor maintains temperature with low vibration
- Sabbath mode
- Front and rear adjustable feet up to 25 mm
- TriMode™: Total Flexibility, make the bottom drawer a refrigerator, fresh food space, or freezer with the control menu

TECHNICAL DETAILS

Total Absorbed Current (A)	2
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length	118 1/8" (3 m)
Plug Type	NEMA 5-15P 125V; 15A
Climate Class	SN/T
Noise level (dB)	41
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	N/A

GENERAL PROPERTIES

• Reversible door	NO
• Equilance hinge	NO
• Soft-Closing glides	YES
• Low vibration	YES
• OptiView (Led Light Spots)	YES
• Freezer Drawers	2
• Full Extension Shelves 90° Door Opening	NO
• Full Extension Drawers 90° Door Opening	YES
• Defrost Process	AUTOMATIC
• Door Open Alarms	YES
• Shopping Fridge	NO
• Shopping Freezer	YES
• Power Failure Alert	YES
• Ice Maker With Water Filter	NO
• Humidity control	NO
• Active carbon filter	NO
• Air filter control	NO
• Volume Compartment 1 (cbf)	3.8
• Total Net Volume (cbf)	3.8
• Total Gross Volume (cbf)	3.8
• Estimated Yearly Electricity Use	294 kwh


TEMPERATURE RANGES

• Climate compartments	1
• Temperature ranges	from 9°F (-13°C) to -9°F

DIMENSIONS & WEIGHT

Height Of The Product (Minimum)	34" (865 mm)
Adjustable Feet Height	up to 1" (25 mm)
Width Of The Product	23 1/2" (598 mm)
Depth Of Product Without Handle	22 1/2" (572 mm)
Wall cavity Height	34 1/4" (870 mm)
Wall cavity Width	23 5/8" (600 mm)
Wall cavity Depth	min 23 5/8" (600 mm)
Net Weight	132 lbs (60 kg)
Gross Weight	165 lbs (75 kg)


PRODUCT SPECIFICATIONS AND DIMENSIONS

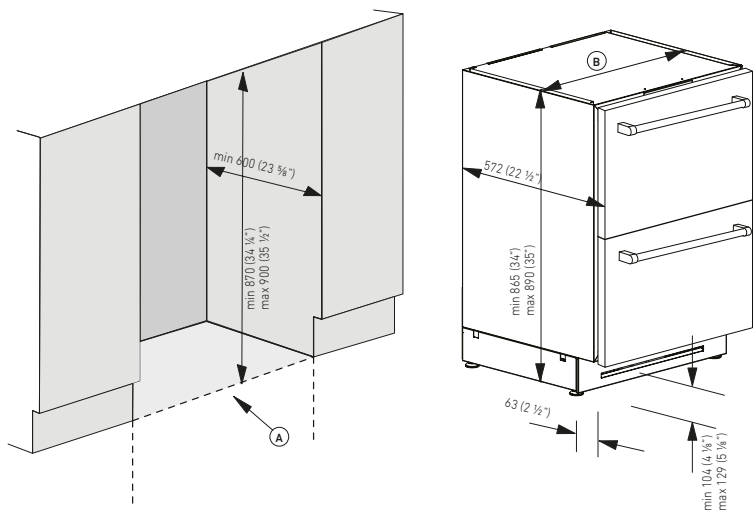

TECHNICAL DATA	
Niche Width A (mm)	23 5/8"
Unit Width B (mm)	23 1/2"

FRONT VIEW

SIDE VIEW

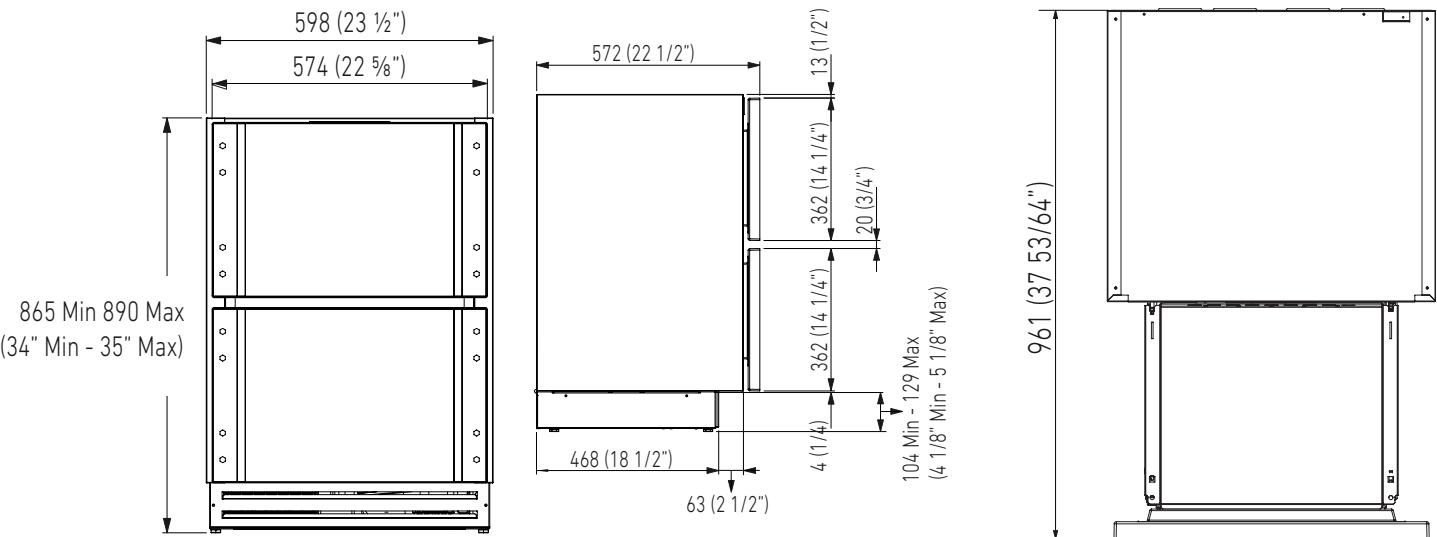


For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.





Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment

ELECTRICAL CONNECTION

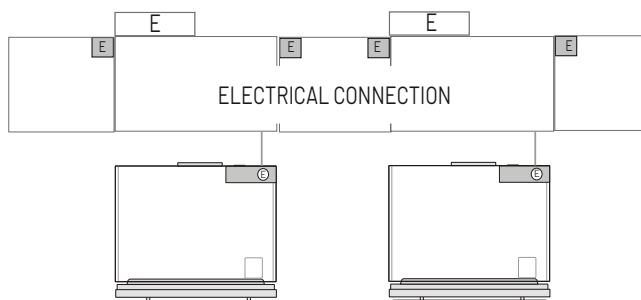

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.

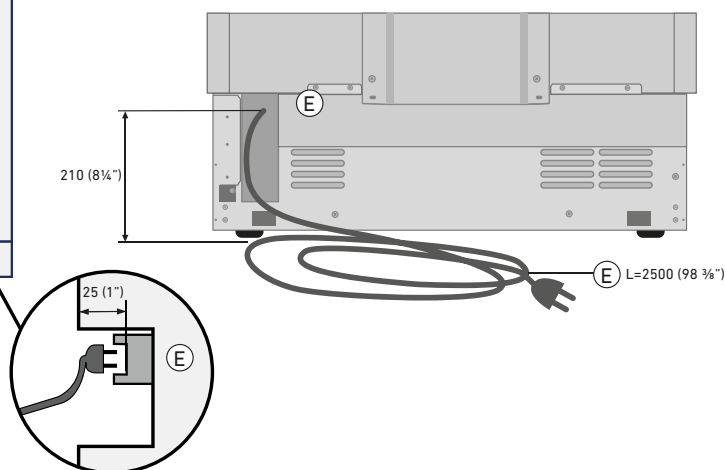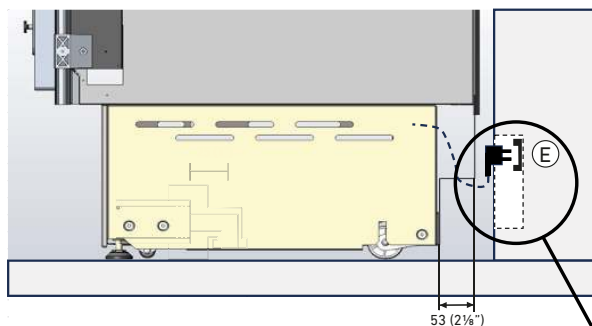

For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.