



PRINCIPAL FEATURES

- Aisi 304 stainless steel body
- Stainless steel interior finish
- Aisi 304 stainless steel anti-bacterial interior
- Optiview: multi - LED light array (top interior) provides excellent illumination to the entire interior
- Soft close door and drawers in all compartments
- Full color TFT smart display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Isolated variable speed compressor maintains temperature with low vibration
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- One independent climatic zone.
- Tempered glass shelves with aluminium profiles.
- Chill to serve: you can rapidly lower the temperature to 2°C before serving.
- Fully integrated / custom panel ready
- Bronzed glass door and Argon gas guarantee maximum protection from harmful UV light rays.
- Reversible door.
- Low vibration compressor
- Full range of models and configurations. Can easily be combined and configured with other Benessi fridge, freezer, wine cellar models to fit your kitchen needs.

TECHNICAL DETAILS

Total Absorbed Current (A)	1.5
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length (in)	118 1/8" (3 m)
Plug Type	NEMA 5-15P 125V; 15A (Type B)
Climatic Class	SN/T
Noise level (dB)	41
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	N/A

GENERAL PROPERTIES

• Reversible door	YES
• Equilance hinge	NO
• Soft-Closing glides	YES
• Low vibration	YES
• OptiView (Led Light Spots)	YES
• Shelves	2
• Type Of Shelves	GLASS
• Full Extension Shelves 90° Door Opening	YES
• Full Extension Drawers 90° Door Opening	NO
• Defrost Process	AUTOMATIC
• Door Open Alarms	YES
• Shopping Fridge	NO
• Shopping Freezer	NO
• Power Failure Alert	YES
• Ice Maker With Water Filter	NO
• Humidity control	NO
• Active carbon filter	YES
• Air filter control	YES
• Volume Compartment 1 (cbf)	5.1
• Total Net Volume (cbf)	5.1
• Total Gross Volume (cbf)	5.1
• Compartment 1 / Upper wine cellar capacity (bottles)	23
• Undercounter glass shelf capacity (cans)	42
• Undercounter bottom wooden bottle holder (bottles)	11
• Estimated Yearly Electricity Use	242 kwh


TEMPERATURE RANGES

• Climatic compartments	3
• Temperature ranges	N/A

DIMENSIONS & WEIGHT

Height Of The Product (Minimum)	34" (865 mm)
Adjustable Feet Height	up to 1" (25 mm)
Width Of The Product	23 1/2" (598 mm)
Depth Of Product Without Handle	22 1/2" (572 mm)
Cut-out Height	34 1/4" (870 mm)
Cut-out Width	23 5/8" (600 mm)
Cut-out Depth	min 23 5/8" (600 mm) + panel thickness for flush install
Net Weight	121 lbs (55 kg)
Gross Weight	154 lbs (70 kg)




PRODUCT SPECIFICATIONS AND DIMENSIONS

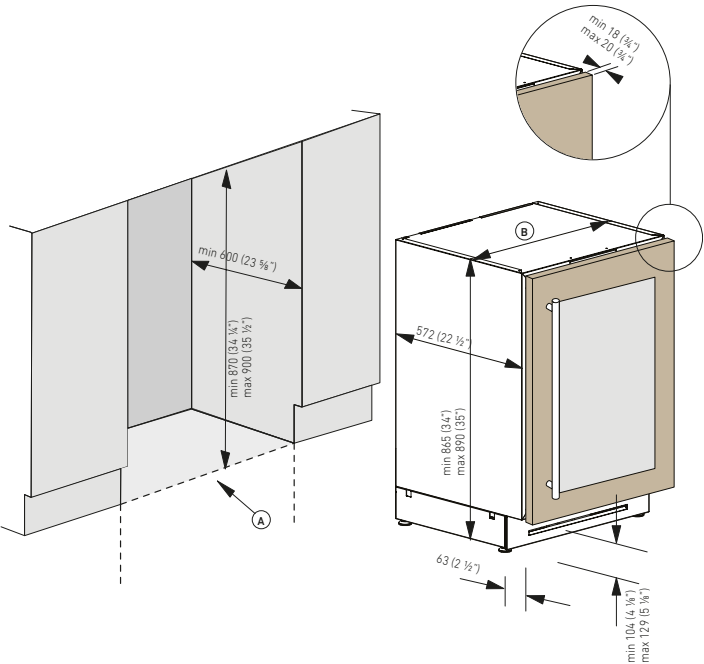

TECHNICAL DATA	
Niche Width A (mm)	23 5/8"
Unit Width B (mm)	23 1/2"

FRONT VIEW

SIDE VIEW

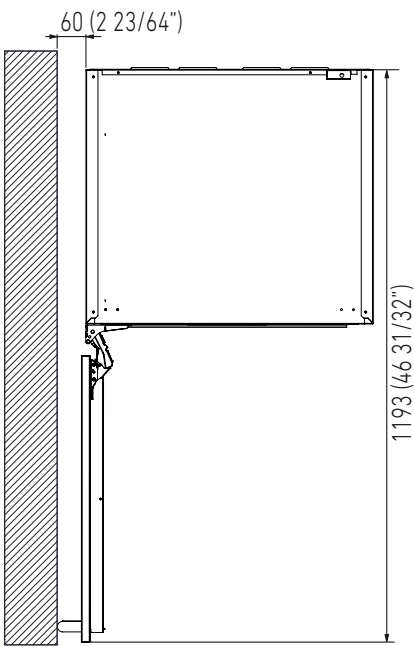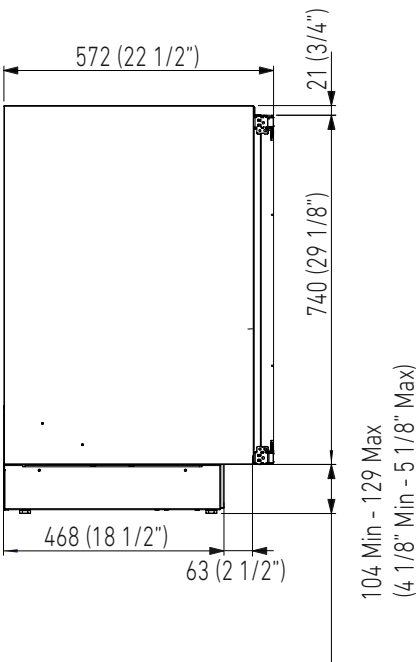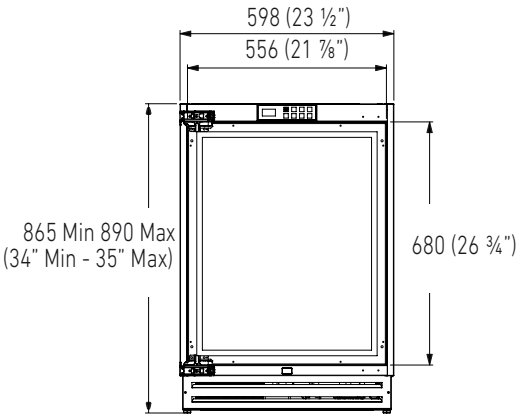


For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.



Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment

CUSTOM PANELS INFORMATION

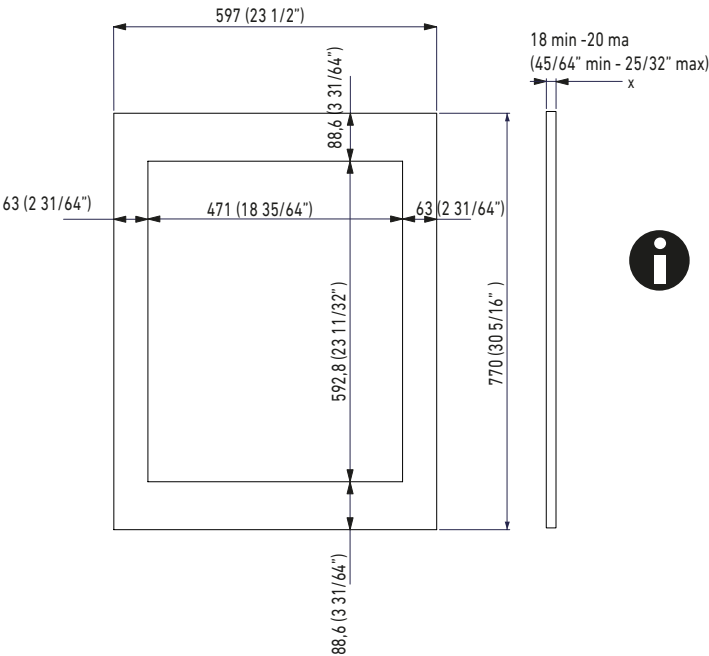


INTEGRATED PANEL RECOMMENDATIONS

Panels with thickness ranging between 3/4" in (18 mm) and 3/4" in (20 mm)


Door Panels Weight Max	22 lbs (10 kg)
Drawer Panels Weight Max	N/A lbs (N/A kg)

ELECTRICAL CONNECTION

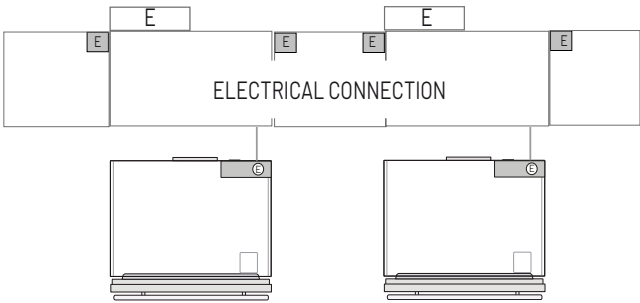

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.

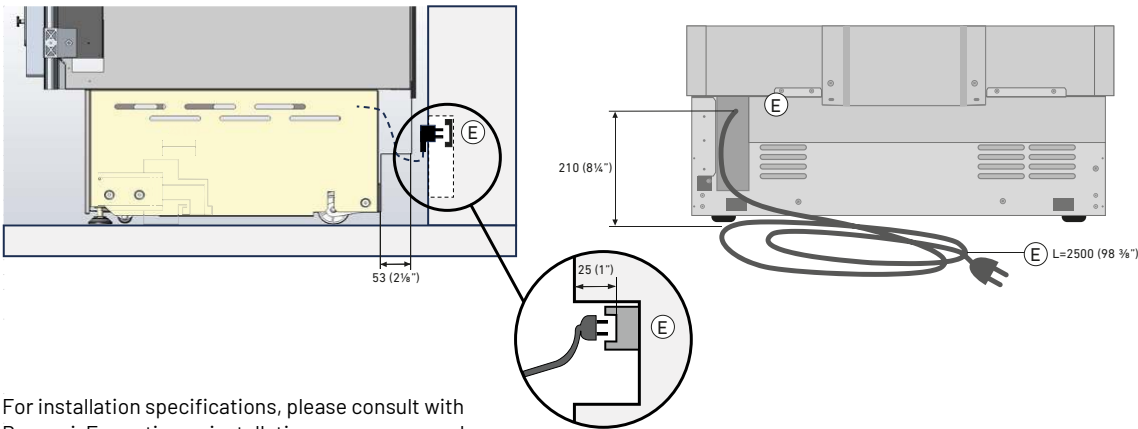

For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.