



PRINCIPAL FEATURES

- Aisi 304 stainless steel body
- Stainless steel interior finish
- Aisi 304 stainless steel anti-bacterial interior
- Optiview: multi - LED light array (top interior) provides excellent illumination to the entire interior
- Soft close door and drawers in all compartments
- Full color TFT smart display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Isolated variable speed compressor maintains temperature with low vibration
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- Two independent climatic zone.
- Wood sliding shelves with soft closing runner.
- Chill to serve: you can rapidly lower the temperature to 2°C before serving.
- Fully integrated / custom panel ready
- Bronzed glass door and Argon gas guarantee maximum protection from harmful UV light rays.
- Reversible door.
- Low vibration compressor
- Full range of models and configurations. Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.

TECHNICAL DETAILS

Total Absorbed Current (A)	2
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length	3 mm
Plug Type	NEMA 5-15P 125V; 15A (Type B)
Climate Class	SN/T
Noise level (dB)	41
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	N/A

GENERAL PROPERTIES

• Reversible door	YES
• Equilance hinge	NO
• Soft-Closing glides	YES
• Low vibration	YES
• OptiView (Led Light Spots)	YES
• Shelves	5
• Type Of Shelves	WOOD
• Full Extension Shelves 90° Door Opening	YES
• Full Extension Drawers 90° Door Opening	NO
• Defrost Process	AUTOMATIC
• Door Open Alarms	YES
• Shopping Fridge	NO
• Shopping Freezer	NO
• Power Failure Alert	YES
• Ice Maker With Water Filter	NO
• Humidity control	YES
• Active carbon filter	YES
• Air filter control	YES
• Volume Compartment 1(L)	143
• Total Net Volume (L)	143
• Total Gross Volume (L)	145
• Compartment 1 / Upper wine cellar capacity (bottles)	41
• Undercounter bottom wooden bottle holder (bottles)	11



TEMPERATURE RANGES

• Climatic compartments	2
• Compartment 1 / Upper Temperature (°C)	from 4 to 18
• Compartment 2 / Middle Temperature (°C)	from 4 to 18
• Low temp zone	NO
• Dual zone	NO

DIMENSIONS & WEIGHT

Height Of The Product (Closed weels)	865 mm
Adjustable Feet Height	25 mm
Width Of The Product	598 mm
Depth Of Product Without Handle	572 mm
Wall cavity Height	870 mm
Wall cavity Width	600 mm
Wall cavity Depth	600 mm
Net Weight	60 kg
Gross Weight	75 kg




PRODUCT SPECIFICATIONS AND DIMENSIONS

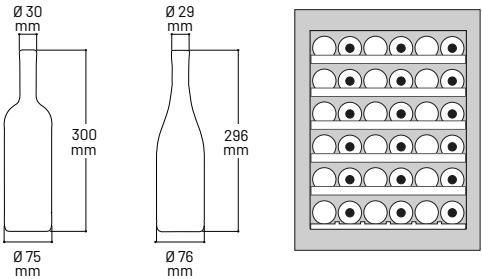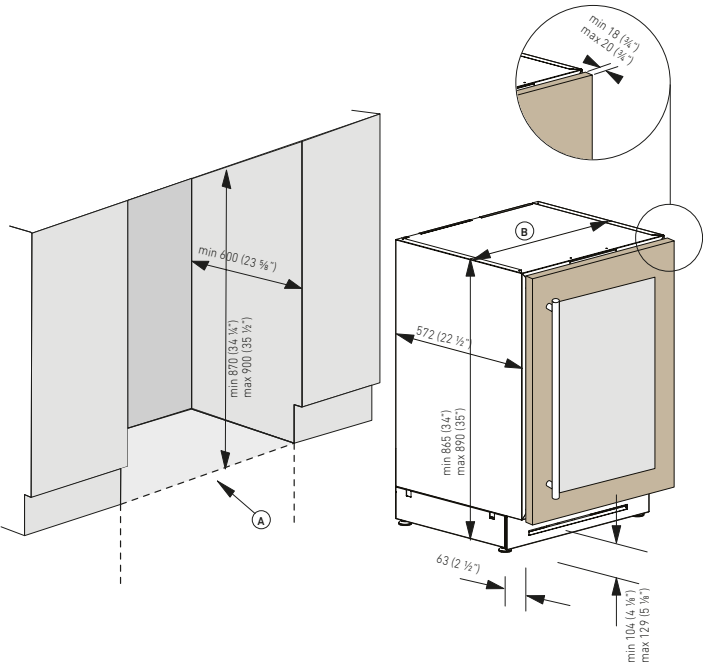

TECHNICAL DATA	
Niche Width A (mm)	600
Unit Width B (mm)	598
Unit Width with lateral frames C (mm)	598

FRONT VIEW

SIDE VIEW

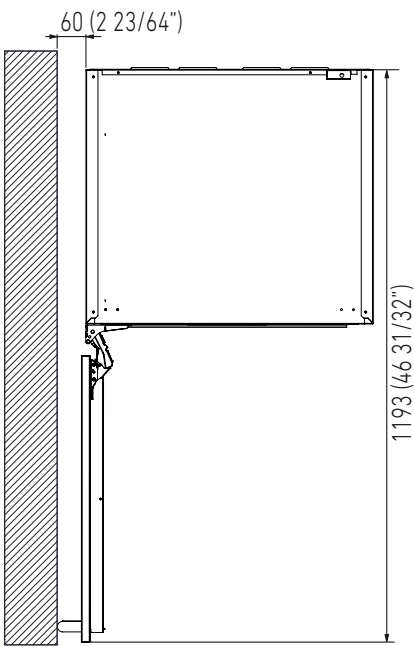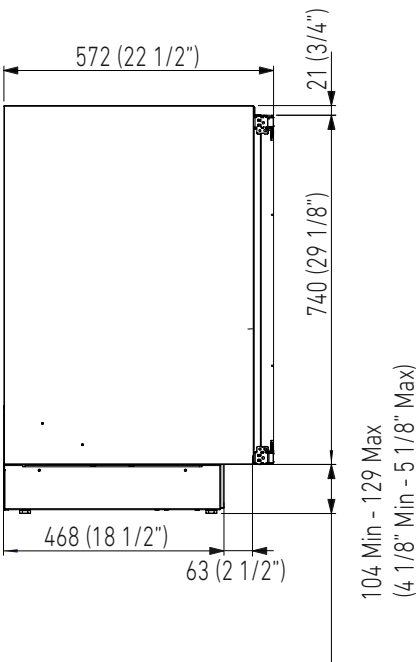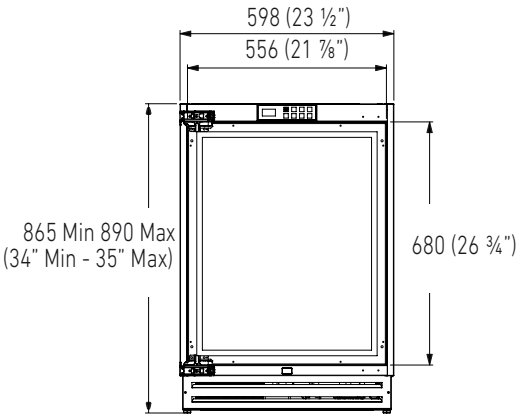


For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.



Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment

CUSTOM PANELS INFORMATION

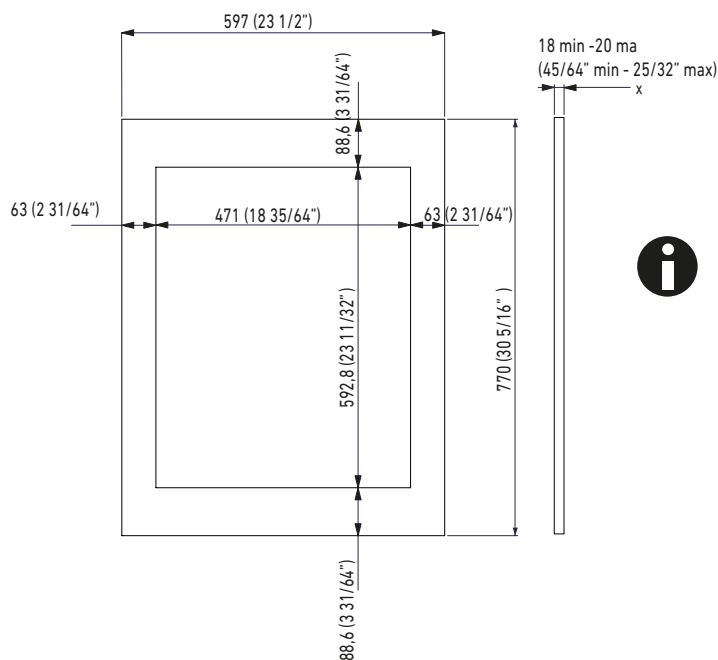


INTEGRATED PANEL RECOMMENDATIONS

Panels with thickness ranging between 18 mm and 20 mm


Door Panels Weight Max	10 kg
Drawer Panels Weight Max	N/A kg

ELECTRICAL CONNECTION

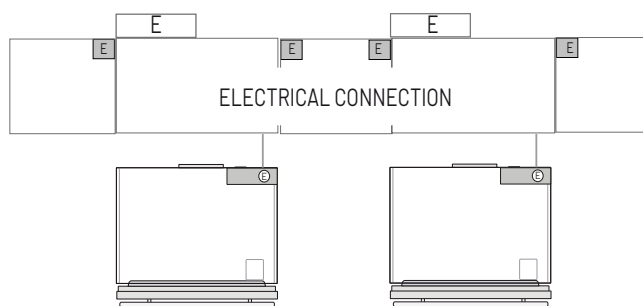

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.

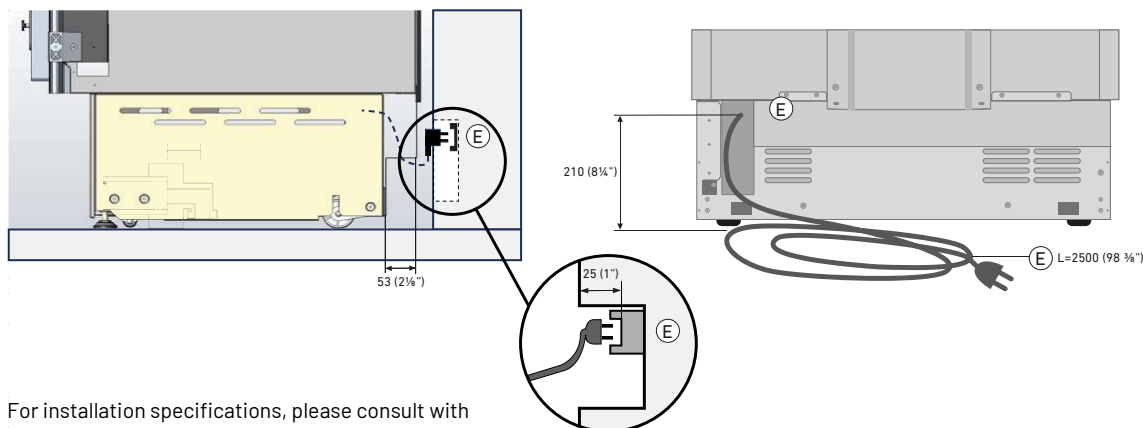

For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.