

BKRUW242SS 24" undercounter wine cellar with Stainless Steel Door



PRINCIPAL FEATURES

- Aisi 304 stainless steel body
- Stainless steel interior finish
- Aisi 304 stainless steel anti-bacteria interior
- Optiview: multi - LED light array (top interior) provides excellent illumination to the entire interior
- Soft close door
- Full color TFT smart display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Insulated variable speed compressor maintains temperature with low vibration
- Sabbath mode
- Front and rear adjustable feet up to 25 mm
- Two independent climatic zones
- Wood sliding shelves with soft closing runners

TEMPERATURE RANGES

- Climate compartments 2
- Temperature ranges from 39°F (4°C) to 64°F

TECHNICAL DETAILS

Total Absorbed Current (A)	2
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length	118 1/8" (3 m)
Plug Type	NEMA 5-15P 125V; 15A
Climate Class	SN/T
Noise level (dB)	41
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	N/A



GENERAL PROPERTIES

- Reversible door YES
- Equilance hinge NO
- Soft-Closing glides YES
- Low vibration YES
- OptiView (Led Light Spots) YES
- Shelves 5
- Type Of Shelves WOOD
- Full Extension Shelves 90° Door Opening YES
- Full Extension Drawers 90° Door Opening NO
- Defrost Process AUTOMATIC
- Door Open Alarms YES
- Shopping Fridge NO
- Shopping Freezer NO
- Power Failure Alert YES
- Ice Maker With Water Filter NO
- Humidity control YES
- Active carbon filter YES
- Air filter control YES
- Volume Compartment 1 (cbf) 5.1
- Total Net Volume (cbf) 5.1
- Total Gross Volume (cbf) 5.1
- Compartment 1 / Upper wine cellar capacity (bottles) 41
- Undercounter bottom wooden bottle holder (bottles) 11
- Estimated Yearly Electricity Use 242 kwh

DIMENSIONS & WEIGHT

Height Of The Product (Minimum)	34" (865 mm)
Adjustable Feet Height	up to 1" (25 mm)
Width Of The Product	23 1/2" (598 mm)
Depth Of Product Without Handle	22 5/8" (576 mm)
Cut-out Height	34 1/4" (870 mm)
Cut-out Width	23 5/8" (600 mm)
Cut-out Depth	min 23 5/8" (600 mm)
Net Weight	139 lbs (63 kg)
Gross Weight	172 lbs (78 kg)




PRODUCT SPECIFICATIONS AND DIMENSIONS

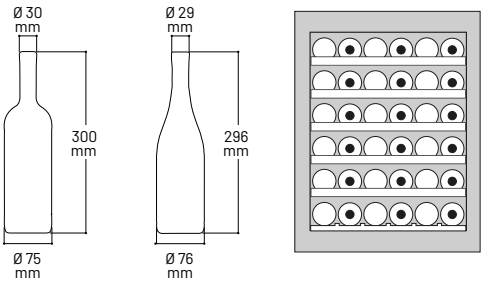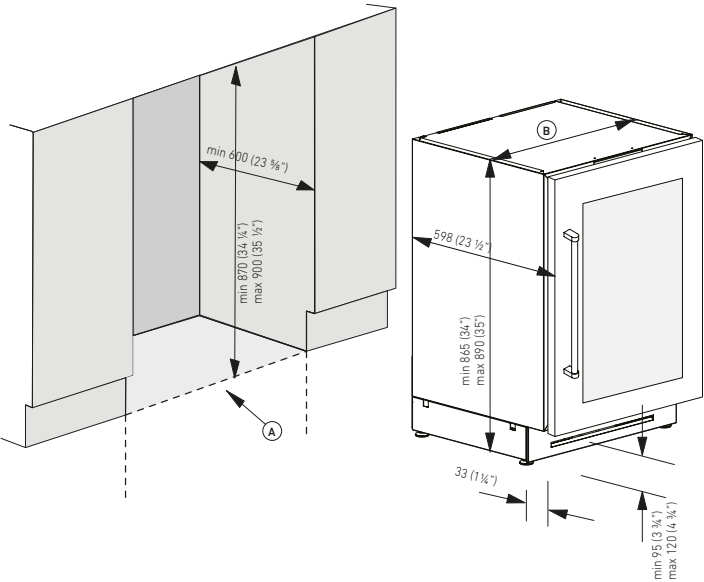

TECHNICAL DATA	
Niche Width A (in)	23 5/8"
Unit Width B (in)	23 1/2"

FRONT VIEW

SIDE VIEW

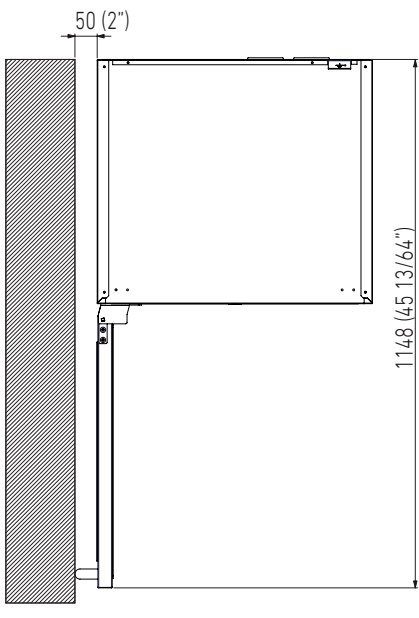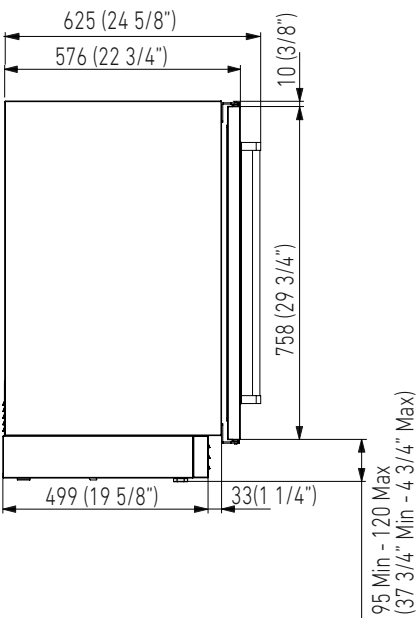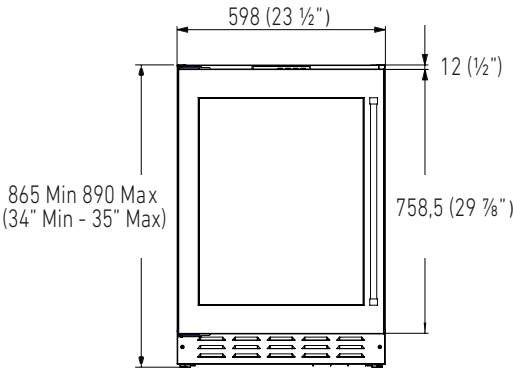


For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.




Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment

ELECTRICAL CONNECTION

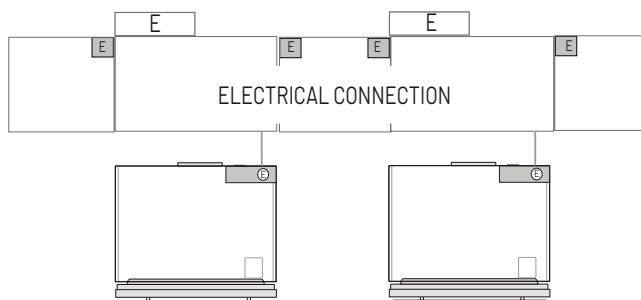


Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.

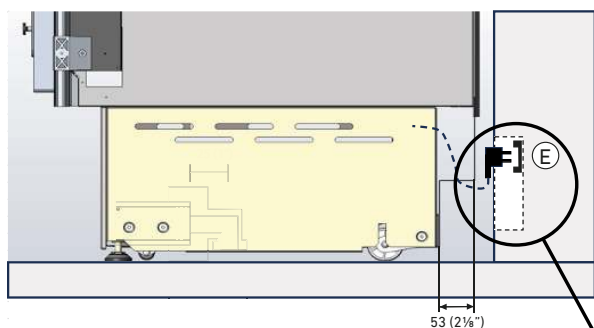


53 (2 1/4")

210 (8 3/4")



25 (1")

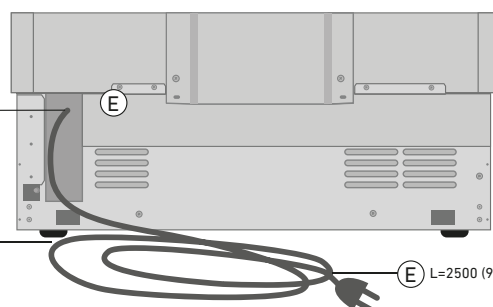

E

L=2500 (98 3/8")



For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.