





PRINCIPAL FEATURES

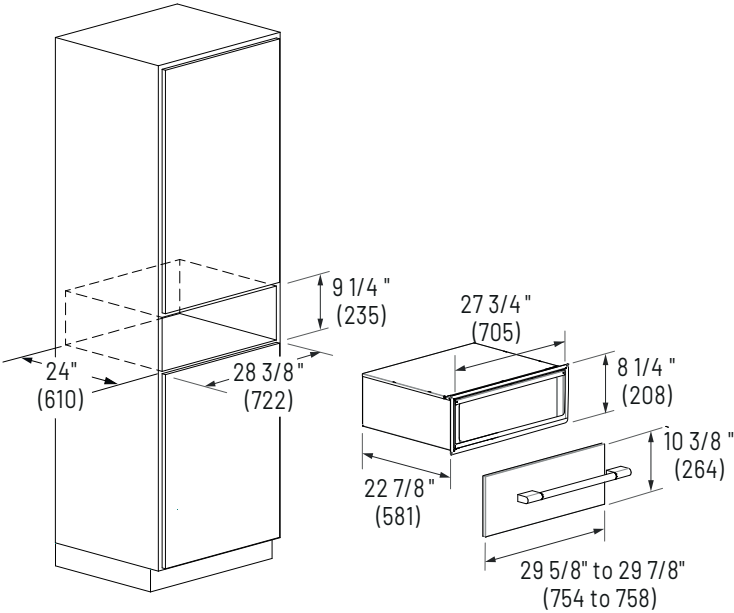

Sliding Telescopic Rails

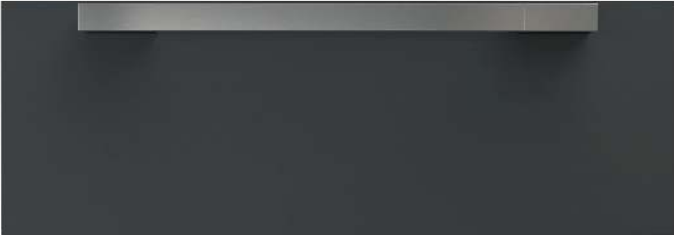

Proofing



Defrost



Keep Warm Function



Slow Cooking



Soft Closing Door



Americans with Disabilities Act †

DESCRIPTION

The 30" pull-to-open panel warming drawer (requires handle), equipped with a soft-closing mechanism, offers unmatched versatility for modern kitchens. Featuring a unique true convection design, this practical appliance goes beyond just warming—it also excels at slow cooking, proofing, dehydrating, and defrosting, all within a compact, fully enclosed space. The convection fan ensures even heat distribution, keeping your side dishes, pies, and bread at the perfect temperature from top to bottom.

Whether you're prepping or serving, this warming drawer is the ultimate kitchen companion.

FEATURES

- Knob Control
- Overlay panel installation
- Pull-to open and Push-to-close
- Soft Closing
- Heavy Duty full extension rails
- True convection heating system
- Even heat distribution
- All stainless steel structure
- Warming Temperature range: min. 90 °F up to 195 °F; min. 30 °C up to 90 °C
- 2 Internal lights
- Handle and overlay panel not included

*To achieve full ADA compliance, please consult the current ADA requirements for product installation instructions.

MODEL CODE	30" WARMING DRAWER PANEL READY - BKWDP30PRO	
GENERAL DETAILS		
Finish	Overlay	
Close/Open Mechanism	Pull-to-open and Push-to-close	
Drawer Material	Stainless Steel	
Compatible Ovens		
Temperature (max), °F (°C)	195	(90)
Thermostat, °F (°C)	90 - 195	(30 - 90)
Interior Lights	2 x 20 W Halogen	
CAPACITY		
Volume (each), cu. ft. (L)	1.9	(53.3)
Useable Width, in. (mm)	24-3/8	(620)
Useable Height, in. (mm)	7-7/8	(200)
Useable Depth, in. (mm)	16-7/8	(430)
DIMENSIONS / WEIGHT		
Product Width, in. (mm)	29-5/8	(754)
Product Height, in. (mm)	10-3/8	(264)
Product Depth, in. (mm)	22-7/8	(581)
Cutout Width, in. (mm)	28-3/8	(722)
Cutout Height (min), in. (mm)	9 1/4	(235)
Cutout Depth (min), in. (mm)	24	(610)
Net Weight, lbs. (kg)	67.2	(30.5)
POWER / RATINGS		
Max power absorbed (W)	1100 W	
Power V (Hz)	120	(60)
Power Cable	NEMA 5-15P	
Power Cable Length, in. (mm)	86 5/8	(2200)
Use & Care Manual / Installation Manual	English / French / Spanish	
WARRANTY		
Limited Warranty	Parts and Labor (2-year)	