

BKF36P

36" All freezer Built-in Column Total NoFrost - Stainless Steel Inner Liner

BENESSI



PRINCIPAL FEATURES

- Truly built in with Stainless Steel inner liner.
- 90° opening flush soft close hinge.
- Large and easy to read digital display.
- Full Extension Drawers.
- Soft close metal drawers.
- Metal door bins.
- Soft close drawers for easy and controlled storage.
- Adjustable temperature from +5 °F (-15 °C) to -11 °F (-24 °C).
- Sabbath mode, Holiday mode, ECO mode, Showroom mode.
- Height adjustable cantilever glass shelves.
- Full size Sky LED panel and side LED lighting.
- Metal cooling with real S.S back panel.
- 3D door adjustment, for easy door panel alignment.
- Ultra quiet 41 dB(A).
- Appliance leveling from the front and rear.
- Interior filtered Automatic ice-maker.

TECHNICAL DETAILS

Supply Voltage, V/Hz	110-127 V ~ 60 HZ 3,00 A
Rated Current, A	2
Noise Level,dBA	41

GENERAL PROPERTIES

• Cooling System	Total No frost
• Cooling System	Electronic Control
• Deodorization Carbon	No
• Internal Filtered Water Dispenser	No
• Control Display Type	LED
• Automatic Defrost	Yes
• Interior Lighting	Full size Sky LED panel and side LED lighting.
• Spill-proof Shelves	4
• Crisper upper	0
• Chiller drawer	0
• Door Racks	3
• Compressor	Variable speed with inverter
• Fan Ventilation	Yes
• Air Duct	ABS with stainless steel cover
• Automatic Defrost	Yes
• Freezer Drawer	3+1
• Automatic Ice Maker	Yes
• Ice Cube Tray	Yes
• Ice Weight, per day	3.9 lbs
• Energy Star Qualified	Yes
• Climate Class	SN-T
• Annual Energy Consumption, kwh/year	549
• Refrigerant	R600a
• Total Net Volume , Cu.ft	20.1 cu-ft (569L)


TEMPERATURE RANGES

- Adjustable temperature from +5 °F (-15 °C) to -11 °F (-24 °C).



DIMENSIONS & WEIGHT

Product Dimension HxWxD, in (mm)	83 9/16" x 35 3/4" x 23 5/16" (2123 x 908 x 592)
Package HxWxD, in (mm)	90 9/16" x 38 1/4" x 26 3/8" (2300 x 972 x 670)
40' HC Loading Quantity	36
Net weight (kg)	161
Gross weight (kg)	181
Wood panel cutout dimensions (HxWxD) in (mm), depth with panel and without handle	84" x 36" x 25" (2134 x 914 x 635)
Door panel cutout dimensions HxW, in (mm) :	70 1/8" x 35 3/4" 1781 X 908




WOOD PANEL CUTOUT DIMENSION AND INSTALLATION CLEARANCE

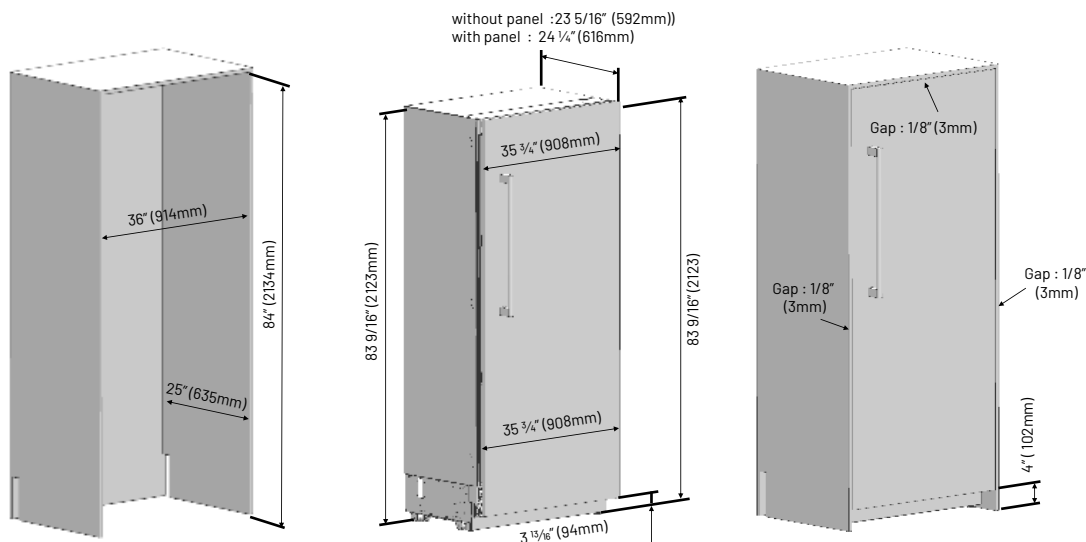

INSTALLATION DIMENSIONS

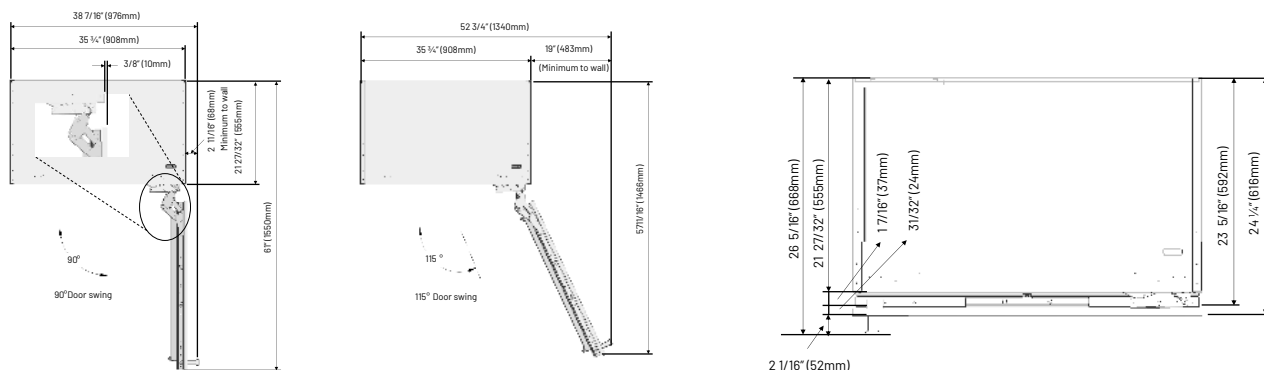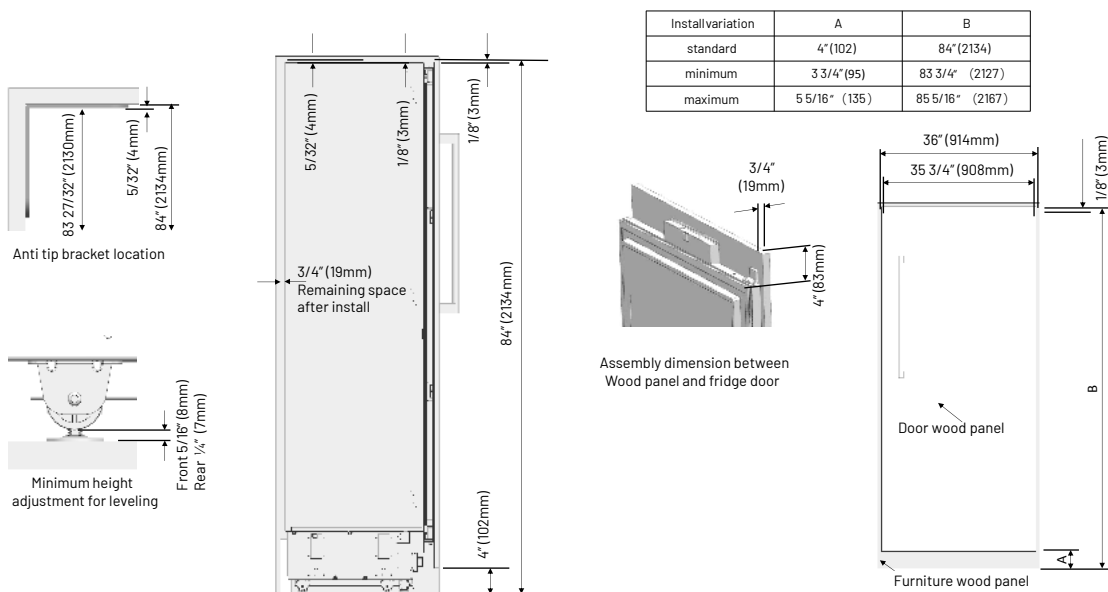


PLUMBING AND ELECTRICAL LOCATION

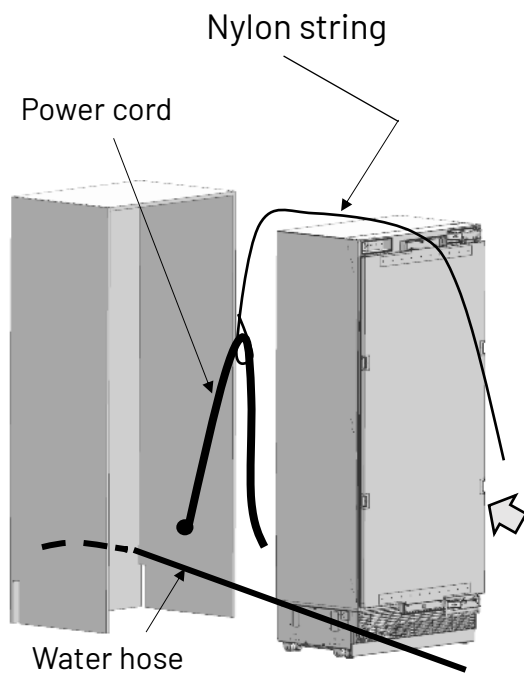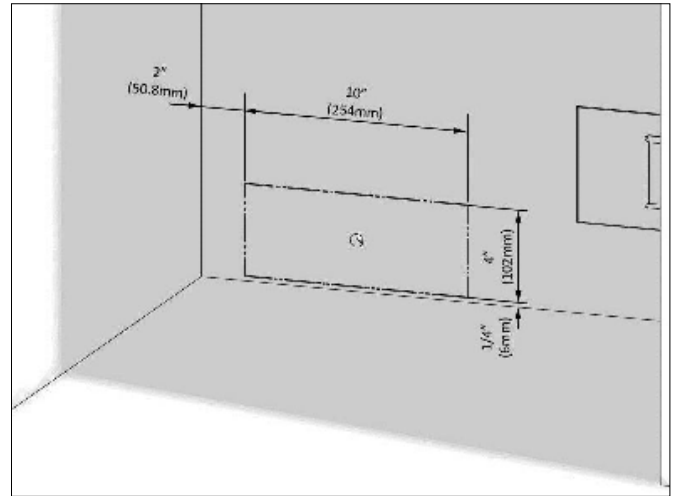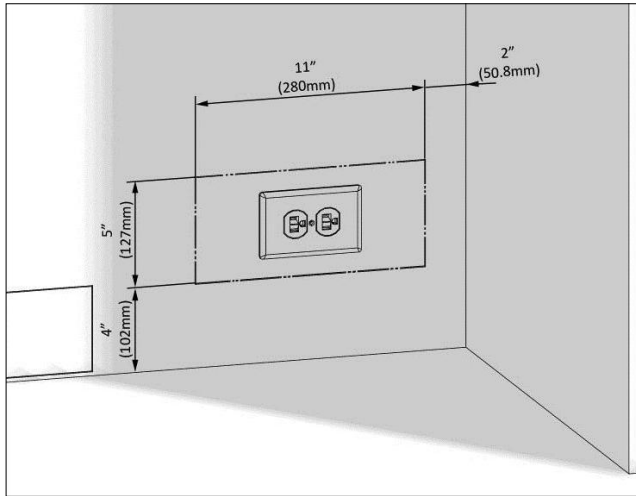

Power cord installation

Use nylon string to prevent the cable from getting jammed.

Keep open for Power cord and Water line if necessary

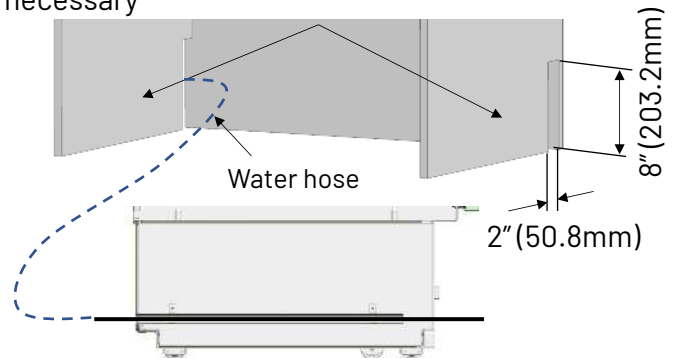

Plumbing

For 1/4" braided stainless units with ice maker and water

Water hose installation

a minimum length of 60" (1.5 meters) and a diameter of 1/4" for water connections